

FORM PTO-1590

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

ATTORNEY DOCKET NUMBER IN-5530	U.S. APPLICATION NO. (IF KNOWN) (SEE 37 RR 15) 10/018336	
INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE 13 April 2000 (13.04.00)	PRIORITY DATE CLAIMED 08. May 1999 (08.05.99)
PCT/EP00/03355		

TITLE OF INVENTION: **AQUEOUS COATING MATERIAL AND MODULAR SYSTEM FOR PRODUCING SAME**

APPLICATION(S) FOR DO/EO/US: **Bernhard LETTMANN**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371 (b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ have been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(C)(2)).
7. ☒ Amendment to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
- ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annex to the International Preliminary Examination Report under PCT Article 36

Items 11. to 16. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A Change of power of attorney and/or address letter.
16. ☒ Other items or information:
A copy of the cover sheet from the PCT Published Application
A copy of the cover sheet from the Priority Document

I hereby certify that the attached correspondence is being deposited with the United States Postal Service in an envelope as "Express Mail Post Office to Addressee" Mailing Label No. **ET332279046US** addressed to the Commissioner for Patents, Washington, D.C. 20231 on October 30, 2001

Marjorie Ellis
Marjorie Ellis

U.S. APPLICATION NO. <u>10/018336</u> <small>(If known, see 37 CFR 1.50)</small>		INTERNATIONAL APPLICATION NO. PCT/EP00/03355		ATTORNEY'S DOCKET NUMBER IN-5530	
17. <input checked="" type="checkbox"/> The following fees are submitted					
Basic National Fee (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) Nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1,040.00					
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO..... \$890.00					
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.44(a)(2)) paid to USPTO..... \$690.00					
International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)..... \$670.00					
International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$ 100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492(e)).				<input type="checkbox"/> 20 <input type="checkbox"/> 30	
				\$	
Claims	Number Filed	Number Extra	Rate		
Total Claims	41 - 20 =	21	X \$18.00	\$378.00	
Independent claims	03 - 03 =	0	X \$80.00	\$	
Multiple dependent claims(s) (if applicable)			+ \$270.00	\$	
TOTAL OF ABOVE CALCULATION =				\$1,268.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				\$	
SUBTOTAL =				\$1,268.00	
Processing fee of \$130.00 for furnishing the English translation later the months from the earliest claimed priority date (37 CFR 1.492(f)).				<input type="checkbox"/> 20 <input type="checkbox"/> 30	
TOTAL NATIONAL FEE =				\$1,268.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+ \$ 40.00	
TOTAL FEES ENCLOSED =				\$1,308.00	
				Amount to be: refunded \$	
				Charged \$1,308.00	

a. ☐ A check in the amount of \$_____ to cover the above fees is enclosed.

b. ☒ Please charge my Deposit Account No. 23-3425 in the amount of \$1,308.00 to cover the above fees
 A triplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
 overpayment to Deposit Account No. 23-3425. A triplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.495 has not been met, a petition to revive (37 CFR
 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

BASF CORPORATION

Patent Department

26701 Telegraph Road

Southfield, Michigan 48034-2442

(248) 948-2355

Customer No. 26922

Michael F. Morgan

SIGNATURE

Michael F. Morgan

 Name

42,906

REGISTRATION NUMBER

PATENT
(Practitioner's Docket No. IN-5530)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Bernhard LETTMANN

Serial No.: This application is a National
Phase of Patent Application PCT/EP00/03355
filed 13 April 2000.


Filed: October 30, 2001

For: AQUEOUS COATING MATERIAL
AND MODULAR SYSTEM FOR
PRODUCING SAME

Group Art Unit: Not Assigned

Examiner: Not Assigned

I hereby certify that the attached correspondence is being
deposited with the United States Postal Service in an envelope as
"Express Mail Post Office to Addressee" Mailing Label No.
ET332279046US addressed to BOX PATENT APPLICATION,
Commissioner for Patents, Washington, D.C. 20231 on October 30,
2001.


Marjorie EllisPRELIMINARY AMENDMENT UNDER 37 CFR § 1.115

BOX PATENT APPLICATION

Commissioner for Patents

Washington, D.C. 20231

Dear Sir:

This preliminary amendment is submitted with the application for entry into the U.S.
National Phase under Chapter II. This application is based on PCT/EP00/03355 filed on 13
April 2001.

In connection with the filing of this National Phase application, please make the
following preliminary amendments.

IN THE SPECIFICATION

After the title, please insert the following paragraph --This application is a National
Phase Application of Patent Application PCT/EP00/03355 filed on 13 April 2000--.

IN THE CLAIMS:

Please substitute claims 1-16 as follows. As required by 37 C.F.R. §1.121, marked copies of the claims showing amendments for claims 1-16 are listed below.

1. (Amended) An aqueous coating material comprising a product formed by mixing with one another

(A1) at least one substantially water-free base color that imparts at least one of color and effect comprising

(a11) at least one binder, wherein the binder is optionally water-soluble or water-dispersible,

(a12) at least one pigment that provides at least one of color and effect, and

(a13) at least one organic solvent, wherein the organic solvent is optionally water-miscible,

and optionally, at least one of

(a14) at least one crosslinking agent,

(a15) at least one auxiliary, and

(a16) at least one additive;

(A2) at least one aqueous color-imparting base color comprising

(a21) at least one water-soluble or -dispersible binder,

(a22) at least one color pigment, and

(a23) water,

and optionally, at least one of

(a24) at least one organic solvent, wherein the organic solvent is optionally water-miscible,

(a25) at least one crosslinking agent,

(a26) at least one auxiliary, and

(a27) at least one additive;

and

(B) at least one aqueous, pigment-free mixing varnish comprising

(b1) at least one water-soluble or -dispersible binder, and

(b2) water,

and optionally, at least one of

(b3) at least one crosslinking agent,

(b4) at least one auxiliary, and

(b5) at least one additive;

and optionally

(C) a pigment-free aqueous medium comprising

(c1) at least one rheology control additive;

optionally, with the proviso that at least one of the additives (a16), (a27), and (b5) further comprise at least one rheology control additive (c1).

2. (Amended) A modular system for preparing aqueous coating materials comprising

(I) at least one substantially water-free module that provides at least one of color and effect comprising

(A1) at least one base color that substantially imparts at least one of color and effect comprising

(a11) at least one binder, wherein the binder is optionally water-soluble or water-dispersible,

(a12) at least one pigment that imparts at least one of color and effect, and

(a13) at least one organic solvent, wherein the organic solvent is optionally water-miscible,

and optionally, at least one of

(a14) at least one crosslinking agent,

(a15) at least one auxiliary, and

(a16) at least one additive;

(II) at least one aqueous color module comprising

(A2) at least one aqueous color-imparting base color comprising

(a21) at least one water-soluble or -dispersible binder,

(a22) at least one color pigment, and

(a23) water,

and optionally, at least one of

(a24) at least one organic solvent, wherein the organic solvent is optionally water-miscible,

(a25) at least one crosslinking agent,

(a26) at least one auxiliary, and

(a27) at least one additive;

and

(III) at least one aqueous, pigment-free mixing varnish module comprising

(B) at least one pigment-free mixing varnish comprising

(b1) at least one water-soluble or -dispersible binder, and

(b2) water,

and optionally, at least one of

(b3) at least one crosslinking agent,

(b4) at least one auxiliary, and

(b5) at least one additive;

and optionally,

(IV) at least one pigment-free rheology module comprising

(C) an aqueous medium comprising

(c1) at least one rheology control additive;

optionally, with the proviso that at least one of the additives (a16), (a27), and (b5)

further comprise at least one rheology control additive (c1).

3. (Amended) A process for preparing an aqueous coating material with precisely defined shade and optical effect comprising mixing modules differing in material composition and function and stored separately from one another, shortly before application of the coating material, wherein the modules comprise

(I) at least one substantially water-free module that provides at least one of color and effect comprising

(A1) at least one substantially water-free base color that imparts at least one of color and effect comprising

(a11) at least one binder, wherein the binder is optionally water-soluble or water-dispersible,

(a12) at least one pigment that imparts at least one of color and effect, and

(a13) at least one organic solvent, wherein the organic solvent is optionally water-miscible,

and optionally, at least one of

(a14) at least one crosslinking agent,

- (a15) at least one auxiliary, and
- (a16) at least one additive;
- (II) at least one aqueous color module comprising
 - (A2) at least one aqueous color-imparting base color comprising
 - (a21) at least one water-soluble or -dispersible binder,
 - (a22) at least one color pigment, and
 - (a23) water,
 - and optionally, at least one of
 - (a24) at least one organic solvent, wherein the organic solvent is optionally water- miscible,
 - (a25) at least one crosslinking agent,
 - (a26) at least one auxiliary, and
 - (a27) at least one additive;

and

- (III) at least one pigment-free mixing varnish module comprising
 - (B) at least one aqueous, pigment-free mixing varnish comprising
 - (b1) at least one water-soluble or -dispersible binder, and
 - (b2) water,
 - and optionally, at least one of
 - (b3) at least one crosslinking agent,
 - (b4) at least one auxiliary, and
 - (b5) at least one additive;

and optionally

- (IV) at least one pigment-free rheology module comprising
 - (C) an aqueous medium comprising
 - (c1) at least one rheology control additive;
 optionally, with the proviso that at least one of the additives (a16), (a27), and (b5) further comprise at least one rheology control additive (c1).

4. (Amended) The aqueous coating material of claim 1, wherein the base color (A1) imparts one of i) effect or ii) color and effect.

5. (Amended) The modular system of claim 2, wherein the modular system comprises one of
1. at least one substantially water-free color module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III),
 2. at least one substantially water-free color and effect module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III), and
 3. at least one substantially water-free effect module (I), at least one substantially water-free color module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III).
6. (Amended) The coating material of claim 1, wherein the additive (b5) comprises at least one rheology control additive.
7. (Amended) The coating material of claim 1 further comprising the pigment-free, aqueous medium (C), and wherein the rheology control additive (c1) is provided only in the pigment-free, aqueous medium (C).
8. (Amended) The modular system of claim 2, wherein the modular system further comprises the at least one pigment-free rheology module (IV).
9. (Amended) The aqueous coating material of claim 1, wherein the binders (a11), (a21), and (b1) come from the same polymer class.
10. (Amended) The aqueous coating material of claim 9, wherein the binders (a11), (a21), and (b1) are polyurethane resins.
11. (Amended) The aqueous coating material of claim 1, wherein the binders (a21) and (b1), and optionally the binder (a11), comprise functional groups that can be converted into anions by at least one of neutralizing agents and anionic groups.

12. (Amended) A method comprising applying the aqueous coating material of claim 1 to a substrate to provide one of an automotive OEM finish, an automotive refinish, and a plastic coating.
13. (Amended) A method comprising applying the aqueous coating material of claim 1 to a substrate as a basecoat, and applying to the basecoat the aqueous coating material of claim 1 as a solid-color topcoat to provide one of an automotive OEM finish, an automotive refinish, and a plastic coating.
14. (Amended) A coating comprising a coating process product of the aqueous coating material of claim 1.
15. (Amended) The coating of claim 14, wherein the coating comprises a multicoat coating system, wherein the multicoat coating system is formed by a wet-on-wet technique, and wherein the multicoat coating system is at least one of a color coating system and an effect coating system.
16. (Amended) An article comprising the coating of claim 14.

Please insert the following new claims:

17. (New) The modular system of claim 2, wherein the base color (A1) imparts one of i) effect or ii) color and effect.
18. (New) The process of claim 3, wherein the base color (A1) imparts one of i) effect or ii) color and effect.
19. (New) The process of claim 3, wherein the mixing modules comprise one of
 1. at least one substantially water-free color module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III),
 2. at least one substantially water-free color and effect module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III), and
 3. at least one substantially water-free effect module (I), at least one substantially water-free color module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III).
20. (New) The modular system of claim 2, wherein the additive (b5) comprises at least one rheology control additive.
21. (New) The process of claim 3, wherein the additive (b5) comprises at least one rheology control additive.
22. (New) The process of claim 3, wherein the aqueous coating material further comprises the at least one pigment-free rheology module (IV).
23. (New) The modular system of claim 2, wherein the binders (a11), (a21), and (b1) come from the same polymer class.
24. (New) The modular system of claim 23, wherein the binders (a11), (a21), and (b1) are polyurethane resins.

25. (New) The process of claim 3, wherein the binders (a11), (a21), and (b1) come from the same polymer class.
26. (New) The process of claim 25, wherein the binders (a11), (a21), and (b1) are polyurethane resins.
27. (New) The modular system of claim 2, wherein the binders (a21) and (b1), and optionally the binder (a11), comprise functional groups that can be converted into anions by at least one of neutralizing agents and anionic groups.
28. (New) The process of claim 3, wherein the binders (a21) and (b1), and optionally the binder (a11), comprise functional groups that can be converted into anions by at least one of neutralizing agents and anionic groups.
29. (New) A method comprising applying the modular system of claim 2 to a substrate to provide one of an automotive OEM finish, an automotive refinish, and a plastic coating.
30. (New) The process of claim 3 further comprising applying the aqueous coating material to a substrate to provide one of an automotive OEM finish, an automotive refinish, and a plastic coating.
31. (New) A method comprising applying the modular system of claim 2 to a substrate as a basecoat, and applying to the basecoat the modular system of claim 2 as a solid-color topcoat to provide one of an automotive OEM finish, an automotive refinish, and a plastic coating.
32. (New) The process of claim 3 further comprising applying the aqueous coating material to a substrate as a basecoat, and applying to the basecoat the aqueous coating material as a solid-color topcoat to provide one of an automotive OEM finish, an automotive refinish, and a plastic coating.

33. (New) A coating comprising a coating process product of the modular system of claim 2.
34. (New) The coating produced by the process of claim 32.
35. (New) An article comprising the coating of claim 15.
36. (New) The coating of claim 33, wherein the coating comprises a multicoat coating system, wherein the multicoat coating system is formed by a wet-on-wet technique, and wherein the multicoat coating system is at least one of a color coating system and an effect coating system.
37. (New) An article comprising the coating of claim 33.
38. (New) An article comprising the coating of claim 36.
39. (New) The coating of claim 34, wherein the coating comprises a multicoat coating system, wherein the multicoat coating system is formed by a wet-on-wet technique, and wherein the multicoat coating system is at least one of a color coating system and an effect coating system.
40. (New) An article comprising the coating of claim 34.
41. (New) An article comprising the coating of claim 39.

Version with Markings to Show Changes Made

As is permitted by 37 C.F.R. §1.121(c)(1)(ii), amendments to the claims are shown by an equivalent marking system. Insertions are still shown by underline, and deletions are shown by strikethrough.

1. (Amended) An aqueous coating material ~~preparable~~comprising a product formed by mixing with one another
 - (A1) at least one substantially water-free base color that imparts at least one of color- and/or effect-~~imparting base color~~ comprising
 - (a11) at least one binder, wherein the binder is optionally water-soluble or water-dispersible binder,
 - (a12) at least one pigment that provides at least one of color and/or effect pigment, and
 - (a13) at least one organic solvent, wherein the organic solvent is optionally water-miscible, ~~organic solvent~~ and also, if desired, comprising optionally, at least one of
 - (a14) at least one crosslinking agent, ~~and/or~~
 - (a15) at least one auxiliary, and/or
 - (a16) at least one additive (coatings additive);
 - (A2) at least one aqueous color-imparting base color comprising
 - (a21) at least one water-soluble or -dispersible binder,
 - (a22) at least one color pigment, and
 - (a23) water, and also, if desired, comprising optionally, at least one of
 - (a24) at least one organic solvent, wherein the organic solvent is optionally water-miscible ~~organic solvent~~,
 - (a25) at least one crosslinking agent, ~~and/or~~
 - (a26) at least one auxiliary, and/or
 - (a27) at least one additive (coatings additive);
- and
- (B) at least one aqueous, pigment-free mixing varnish comprising
 - (b1) at least one water-soluble or -dispersible binder, and
 - (b2) water,

and ~~also, if desired, comprising~~optionally, at least one of

- (b3) at least one crosslinking agent, and/or
- (b4) at least one auxiliary, and/or
- (b5) at least one additive (coatings additive);

and ~~also, if desired, comprising~~optionally

- (C) a pigment-free aqueous medium comprising
- (c1) at least one rheology control additive;

optionally, with the proviso that at least one of the coatings additives (a156), (a267), and/or (b45) ~~may also further~~ comprise at least one rheology control additive (c1).

2. (Amended) A modular system for preparing aqueous coating materials, ~~at least~~ comprising

(I) at least one substantially water-free module that provides at least one of color and/or effect ~~module~~ comprising

(A1) at least one base color that substantially imparts at least one of color- and/or effect-~~imparting base color~~ comprising

(a11) at least one binder, wherein the binder is optionally water-soluble or water-dispersible binder,

(a12) at least one pigment that imparts at least one of color and ~~and/or~~ [sic] effect pigment, and

(a13) at least one organic solvent, wherein the organic solvent is optionally water-miscible, ~~organic solvent~~

and ~~also, if desired, comprising~~optionally, at least one of

(a14) at least one crosslinking agent, and/or

(a15) at least one auxiliary, and/or

(a16) at least one additive (coatings additive);

(II) at least one aqueous color module comprising

(A2) at least one aqueous color-imparting base color comprising

(a21) at least one water-soluble or -dispersible binder,

(a22) at least one color pigment, and

(a23) water,

and ~~also, if desired, comprising~~optionally, at least one of

(a24) at least one organic solvent, wherein the organic solvent is
optionally water- miscible-organic solvent,

(a25) at least one crosslinking agent, and/or

(a26) at least one auxiliary, and/or

(a27) at least one additive (coatings additive);

and

(III) at least one aqueous, pigment-free mixing varnish module comprising

(B) at least one pigment-free mixing varnish comprising

(b1) at least one water-soluble or -dispersible binder, and

(b2) water,

and also, if desired, comprising optionally, at least one of

(b3) at least one crosslinking agent, and/or

(b4) at least one auxiliary, and/or

(b5) at least one additive (coatings additive);

and also, if desired, comprising optionally,

(IV) at least one pigment-free rheology module comprising

(C) an aqueous medium comprising

(c1) at least one rheology control additive;

optionally, with the proviso that at least one of the coatings-additives (a156), (a267),
and/or (b45) may also further comprise at least one rheology control additive (c1).

3. (Amended) A process for preparing an aqueous coating material with precisely defined shade and optical effect ~~by with [sic] comprising~~ mixing modules differing in material composition and function and stored separately from one another, shortly before the application of the coating material, ~~which comprises mixing with one another at least [sic] wherein the modules comprise~~

(I) at least one substantially water-free module that provides at least one of color
and/or effect ~~module comprising~~

(A1) at least one substantially water-free base color that imparts at least one
of color- and/or effect imparting base color comprising

(a11) at least one binder, wherein the binder is optionally water-
soluble or water-dispersible binder,

- (a12) at least one pigment that imparts at least one of color and/or effect-pigment, and
 - (a13) at least one organic solvent, wherein the organic solvent is optionally water- miscible-organic-solvent and ~~also, if desired, comprising~~optionally, at least one of
 - (a14) at least one crosslinking agent, ~~and/or~~
 - (a15) at least one auxiliary, ~~and/or~~
 - (a16) at least one additive (coatings-additive);
- (II) at least one aqueous color module comprising
- (A2) at least one aqueous color-impacting base color comprising
 - (a21) at least one water-soluble or -dispersible binder,
 - (a22) at least one color pigment, and
 - (a23) water,
 - and ~~also, if desired, comprising~~optionally, at least one of
 - (a24) at least one organic solvent, wherein the organic solvent is optionally water- miscible-organic-solvent,
 - (a25) at least one crosslinking agent, ~~and/or~~
 - (a26) at least one auxiliary, ~~and/or~~
 - (a27) at least one additive (coatings-additive);
- and
- (III) at least one pigment-free mixing varnish module comprising
- (B) at least one aqueous, pigment-free mixing varnish comprising
 - (b1) at least one water-soluble or -dispersible binder, and
 - (b2) water,
 - and ~~also, if desired, comprising~~optionally, at least one of
 - (b3) at least one crosslinking agent, ~~and/or~~
 - (b4) at least one auxiliary, ~~and/or~~
 - (b5) at least one additive (coatings-additive);
- and ~~also, if desired, comprising~~optionally
- (IV) at least one pigment-free rheology module comprising
- (C) an aqueous medium comprising
 - (c1) at least one rheology control additive;

optionally, with the proviso that at least one of the coatings additives (a156), (a267), and/or (b45) may also further comprise at least one rheology control additive (c1).

4. (Amended) The aqueous coating material ~~as claimed in~~ claim 1, ~~the modular system as claimed in claim 2 or the process as claimed in claim 3,~~ wherein the base color (A1) imparts one of ~~imparts i)~~ effect or ~~both ii)~~ color and effect.
5. (Amended) The modular system ~~as claimed in~~ claim 2 ~~or 4 or the process as claimed in claim 3 or 4,~~ wherein the modular system comprises one of
 1. at least one substantially water-free color module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III), ~~or~~
 2. at least one substantially water-free color and effect module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III), ~~or and~~
 3. at least one substantially water-free effect module (I), at least one substantially water-free color module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III).
6. (Amended) The coating material ~~as claimed in~~ claim 1 ~~or 4, the modular system as claimed in any of claims 2, 4 and 5, or the process as claimed in any of claims 3 to 5,~~ wherein ~~at least one aqueous, pigment-free mixing varnish (B) the additive (b5) comprises at least one rheology control additive as coatings additive (b4).~~
7. (Amended) The coating material ~~as claimed in~~ claim 1 ~~or 4, further~~ comprising at the pigment-free, aqueous medium (C), and wherein the rheology control additive (c1) being present is provided only in said the pigment-free, aqueous medium (C).
8. (Amended) The modular system ~~as claimed in any of claims 2, 4 and 5 or process as claimed in any of claims 3 to 5,~~ wherein the modular system further comprises the at least one pigment-free rheology module (IV).


9. (Amended) The aqueous coating material ~~as claimed in any of claims 1, 4, 6 and 7, the modular system as claimed in any of claims 2, 4 to 6 and 8, or the process as claimed in with [sic] any of claims 3 to 6 and 8,~~ wherein the binders (a11), (a21), and (b1) come from the same polymer class.
10. (Amended) The aqueous coating material, ~~the modular system or the process as claimed in~~ of claim 9, wherein the binders (a11), (a21), and (b1) are polyurethane resins.
11. (Amended) The aqueous coating material ~~as claimed in any of claims 1, 4, 6, 7, 9 and 10, the modular system as claimed in any of claims 2, 4 to 6 and 8 to 10, or the process as claimed in any of claims 3 to 6 and 8 to 10,~~ wherein the binders (a21) and (b1), and also, if desired, optionally the binder (a11), comprise
- (ii) —functional groups ~~which that~~ that can be converted into anions by at least one of neutralizing agents; and/or anionic groups, ~~especially carboxylic acid and/or carboxylate groups.~~
12. (Amended) ~~The use of~~ A method comprising applying the aqueous coating material ~~as claimed in any of claims 1, 4, 6, 7, 9 and 10, of the modular system as claimed in any of claims 2, 4 to 6 and 8 to 10, or of the process as claimed in any of claims 3 to 6 and 8 to 10 in to a substrate to provide one of an automotive OEM finishing, an automotive refinish, and thea plastic coating of plastics, but especially automotive refinish.~~
13. (Amended) ~~The use of~~ A method comprising applying the aqueous coating material ~~as claimed in any of claims 1, 4, 6, 7, 9 and 10, of the modular system as claimed in any of claims 2, 4 to 6 and 8 to 10, or of the process as claimed in any of claims 3 to 6 and 8 to 10 for preparing to a substrate as a basecoat, and applying to the basecoat the aqueous coating material of claim 1 as a solid-color topcoats and basecoats, but especially basecoats, for to provide one of an automotive OEM finishing, an automotive refinish, and thea plastic coating of plastics, but especially automotive refinish.~~

14. (Amended) ~~An automotive OEM coating or automotive refinish, or else a coating on a plastic, producible from~~ A coating comprising a coating process product of the aqueous coating materials as set forth in any of claims 1, 4, 6, 7, 9 and 10 and/or using the modular system as claimed in any of claims 2, 4 to 6 and 8 to 10 and/or using the process as claimed in any of claims 3 to 6 and 8 to 10.
15. (Amended) ~~An automotive OEM coating or automotive refinish, or else a coating on a plastic, as claimed in~~ The coating of claim 14, wherein the coating comprises a multicoat color and/or effect coating system, producible in particular wherein the multicoat coating system is formed by the wet-on-wet technique, and wherein the multicoat coating system is at least one of a color coating system and an effect coating system.
16. (Amended) ~~An article, especially an automobile body or plastics component, having an automotive OEM finish or automotive refinish and/or a coating on a plastic, as claimed in claim~~ comprising the coating of claim 14 or 15.

REMARKS

Upon entry of the present amendment claims 1-41 are pending in the application. Claims 1-16 have been amended in accordance with the requirements of U.S. patent practice. New claims 17-41 add no new matter, as these claims contain subject matter deleted from the amended claims. There are three (3) independent claims and a total of forty-one (41) claims pending in the application. Applicant respectfully requests entry of the preliminary amendment.

Respectfully Submitted,



Michael F. Morgan
Registration No. 42,906

Date: October 30, 2001
BASF Corporation
26701 Telegraph Road
Southfield, Michigan 48034-2442
(248)-948-2355
Customer No. 26922

PAT 99153 PCT
BASF Coatings AG

04.03.2000

Aqueous coating material and modular system for its preparation

5 The present invention relates to a novel modular system (mixer system) for preparing novel aqueous coating materials in precision-attunable shades and optical effects. The present invention further relates to the use of the novel modular system in automotive OEM
10 finishing and refinish and in the painting of plastics.

The German patent application DE-A-41 10 520 discloses a mixer system suitable for preparing aqueous coating materials in precision-attunable shades and optical
15 effects as and when required. This known mixer system comprises substantially water-free color and/or effect base colors and at least one aqueous, pigment-free mixing varnish. Owing to their variability, this mixer system and the coating materials prepared from it go a
20 substantial way toward meeting the ever-increasing requirements of the market. However, they are still capable of further improvement in terms of their hiding power.

25 The patent EP-A-0 608 773 discloses a modular system which comprises an effect module, containing at least 20% by weight water, and an aqueous, pigment-free mixing varnish. This known modular system also permits coating materials to be prepared in precision-attunable

shades and optical effects. A disadvantage is that, owing to the high water content of the effect module, aluminum-based metallic effect pigments in said module frequently undergo decomposition, accompanied by the evolution of hydrogen. This impairs the storage stability of the effect module.

The patent EP-A-0 614 951 discloses a modular system comprising a color module, containing at least 20% by weight water, and an aqueous, pigment-free mixing varnish. This modular system, however, permits only the preparation of solid-color topcoat materials.

The patent EP-A-0 471 972 describes a modular system which comprises a substantially water-free effect module containing metallic effect pigments, an aqueous color module, and a rheology module. Instead of the aqueous color module, one possible alternative is to use an aqueous, pigment-free mixing varnish. A key feature of this known modular system is that the color of the coating material prepared from it can be adjusted only by way of the aqueous color module. Moreover, the hiding power of the coating materials prepared using this modular system is still capable of further improvement.

It is an object of the present invention to provide a new modular system which overall possesses greater storage stability than the modular systems known to

date and which allows coating materials to be prepared simply, as and when required, in precision-attunable shades and optical effects, said coating materials being intended to provide coatings which possess a
5 higher hiding power than the coatings of the prior art.

The invention accordingly provides the novel aqueous coating material preparable by mixing with one another

10 (A1) at least one substantially water-free color-
and/or effect-imparting base color comprising

(a11) at least one optionally water-soluble or
-dispersible binder,

15 (a12) at least one color and/or effect pigment,
and

(a13) at least one optionally water-miscible
20 organic solvent and also, if desired,
comprising

(a14) at least one crosslinking agent and/or

25 (a15) at least one auxiliary and/or additive
(coatings additive);

(A2) at least one aqueous color-imparting base color
comprising

(a21) at least one water-soluble or -dispersible binder,

(a22) at least one color pigment, and

(a23) water, and also, if desired, comprising

(a24) at least one optionally water-miscible organic solvent,

(a25) at least one crosslinking agent and/or

(a26) at least one auxiliary and/or additive (coatings additive);

and

(B) at least one aqueous, pigment-free mixing varnish comprising

(b1) at least one water/soluble or -dispersible binder and

(b2) water, and also, if desired, comprising

(b3) at least one crosslinking agent and/or

(b4) at least one auxiliary and/or additive (coatings additive);

and also, if desired, comprising

(C) a pigment-free aqueous medium comprising

5 (c1) at least one rheology control additive;

with the proviso that the coatings additives (a15),
(a26) and/or (b4) may also comprise at least one
rheology control additive (c1).

10

In the text below, the novel aqueous coating material
is referred to as the "coating material of the
invention".

15 The invention also provides the novel modular system
for preparing aqueous coating materials which comprises
at least the following key constituents:

(I) at least one substantially water-free color and/or
20 effect module comprising

(A1) at least one substantially color- and/or
effect-imparting base color comprising

25 (a11) at least one optionally water-soluble
or -dispersible binder,

(a12) at least one color and/or effect
pigment, and

(a13) at least one optionally water-miscible organic solvent and also, if desired, comprising

5 (a14) at least one crosslinking agent and/or

(a15) at least one auxiliary and/or additive (coatings additive);

10 (II) at least one aqueous color module comprising

(A2) at least one aqueous color-imparting base color comprising

15 (a21) at least one water-soluble or -dispersible binder,

(a22) at least one color pigment, and

20 (a23) water, and also, if desired, comprising

(a24) at least one optionally water-miscible organic solvent,

25 (a25) at least one crosslinking agent and/or

(a26) at least one auxiliary and/or additive (coatings additive);

and

(III) at least one aqueous, pigment-free mixing
varnish module comprising

5

(B) at least one pigment-free mixing varnish
comprising

10

(b1) at least one water-soluble or
-dispersible binder and

(b2) water, and also, if desired,
comprising

15

(b3) at least one crosslinking agent
and/or

(b4) at least one auxiliary and/or
additive (coatings additive);

20

and also, if desired, comprising

(IV) at least one pigment-free rheology module
comprising

25

(C) an aqueous medium comprising

(c1) at least one rheology control
additive;

with the proviso that the coatings additives (a15), (a26) and/or (b4) may also comprise at least one rheology control additive (c1).

5 In the context of the present invention, the term "module" refers to a standardized, ready-to-use commercial product whose profile of performance properties is precisely matched to and supplements the profiles of properties of other modules, so that the
10 modules overall may be combined to form a modular system.

In the text below, the novel modular system for preparing aqueous coating materials is referred to as
15 the "modular system of the invention".

The invention further provides a novel process for preparing an aqueous coating material with precisely defined shade and optical effect, in which the aqueous
20 coating material is prepared shortly before its application, by mixing modules differing in material composition and function and stored separately from one another, and which involves mixing with one another at least [sic]

25

(I) at least one substantially water-free color and/or effect module comprising

(A1) at least one substantially water-free color-
and/or effect-imparting base color
comprising

5 (a11) at least one optionally water-soluble
or -dispersible binder,

(a12) at least one color and/or effect
pigment, and

10

(a13) at least one optionally water-miscible
organic solvent and also, if desired,
comprising

15

(a14) at least one crosslinking agent and/or

(a15) at least one auxiliary and/or additive
(coatings additive);

20 (II) at least one aqueous color module comprising

(A2) at least one aqueous color-imparting base
color comprising

25 (a21) at least one water-soluble or
-dispersible binder,

(a22) at least one color pigment, and

(a23) water, and also, if desired, comprising

(a24) at least one optionally water-miscible
organic solvent,

5

(a25) at least one crosslinking agent and/or

(a26) at least one auxiliary and/or additive
(coatings additive);

10

and

(III) at least one pigment-free mixing varnish module
comprising

15

(B) at least one aqueous, pigment-free
mixing varnish comprising

20

(b1) at least one water-soluble or
-dispersible binder and

(b2) water, and also, if desired,
comprising

25

(b3) at least one crosslinking agent
and/or

(b4) at least one auxiliary and/or
additive (coatings additive);

and also, if desired, comprising

(IV) at least one pigment-free rheology module comprising

5

(C) an aqueous medium comprising

(c1) at least one rheology control additive;

10

with the proviso that the coatings additives (a15), (a26) and/or (b4) may also comprise at least one rheology control additive (c1).

15 In the text below, the novel process for preparing the coating material of the invention is referred to as the "process of the invention".

In the light of the prior art it was surprising and unforeseeable for the skilled worker that the object on which the invention is based might be achieved with the aid of the modular system of the invention. A particular surprise was that the modular system of the invention possesses a storage stability which matches or even exceeds that of the known modular systems. A further surprise was that the modular system of the invention, while possessing otherwise identical or even better performance properties, provides coating materials of the invention that have a significantly

20

25

higher pigment content and can be used to produce coatings which in terms of their hiding power are superior to the prior art coatings. Especially surprising was that the storage stability of the individual modules also exceeds that of the known modules. Not least a surprise was the key advantage that the aqueous color module (II) and the aqueous, pigment-free mixing varnish module (III), on the one hand, and the substantially water-free color and/or effect module (I), on the other, are very highly compatible with one another and cause no problems whatsoever on mixing. Moreover, it proves to be a further key advantage of the modular system of the invention that, to the extent that practice requires it, it may be used like the mixer system known from the German patent application DE-A-40 10 520.

The modular system of the invention accordingly comprises at least one substantially water-free color and/or effect module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III). What this means in the context of the present invention is that besides the aqueous color module (II) there is always at least one substantially water-free module (I) which takes on part of the function of coloring.

Accordingly, the first variant of the modular system of the invention comprises at least one substantially

water-free color module (I), which therefore takes on part of the function of coloring, at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III). This variant is used
5 to produce solid-color topcoats and multicoat systems which are substantially free from optical effects such as metallic effects.

In accordance with the invention, the modular system of
10 the invention in its second variant, which is preferred in accordance with the invention, comprises at least one substantially water-free color and effect module (I), which thus takes on all of the function of effect and part of the function of coloring, at least one
15 aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III).

In accordance with the invention, the modular system of the invention in its third variant, which is likewise
20 preferred in accordance with the invention, comprises at least one substantially water-free effect module (I), which thus serves solely for imparting effect, at least one substantially water-free color module (I), at least one aqueous color module (II), and at least one
25 aqueous, pigment-free mixing varnish module (III).

The substantially water-free color and/or effect module (I), the aqueous color module (II) and/or the aqueous, pigment-free mixing varnish module (III) may comprise

at least one rheology control additive. In accordance with the invention it is of advantage if at least one of these additives is present only in the aqueous color module (II) and/or in the aqueous, pigment-free mixing
5 varnish module (III), especially only in the aqueous, pigment-free mixing varnish module (III).

However, in accordance with the invention, particular additional advantages result if the rheology control
10 additive is present additionally or only, but especially only, in the pigment-free rheology module (IV). Modular systems of the invention which comprise at least one pigmented rheology module (IV) are therefore used with particular preference.

15 The first key constituent of the modular system of the invention is at least one substantially water-free color and/or effect module (I).

20 In the context of the present invention, the phrase "substantially water-free" means that the color and/or effect modules (I) in question contain no water at all or contain the water only in amounts such as result from the water content of the starting products. These
25 amounts are preferably below 5% by weight, with particular preference 3% by weight, with very particular preference 2% by weight, and in particular 1% by weight water, based on the total amount of the color and/or effect module (I) in question.

Moreover, the term "color and/or effect module" indicates that this module is used to set the shading and/or optical effect of the coating material prepared using it. Accordingly, the module (I) for use in accordance with the invention comprises alternatively a color module (I), an effect module (I), or a color and effect module (I).

The color module (I) for use in accordance with the invention is used in particular to prepare coating materials of the invention with precision-attunable color shade for the production of solid-color topcoats and basecoats, preferably basecoats. The optical effect of the coating materials of the invention is adjusted by means of the effect module (I) for use in accordance with the invention. Using the color and effect module (I) for use in accordance with the invention it is possible to adjust precisely both the color shade and the optical effect of the coating materials of the invention.

The key constituent of the effect module (I) for use in accordance with the invention is at least one substantially water-free color- and/or effect-imparting base color (A1). It is subject, mutatis mutandis, to the same comments made regarding the effect module (I).

The first key constituent of the base color (A1) is at least one optionally water-soluble or -dispersible

binder (a11). If use is made of a binder (a11) which is not soluble or dispersible in water, it must be water-dispersible in the presence of the binders (a21) and (b1) described below.

5

Suitable binders (a11) include in principle all binders as also used in the known modular system described in the patents DE-A-41 10 520, EP-A-0 608 773, and EP-A-0 614 951.

10

Suitable binders (a11) which per se are not soluble or dispersible in water but which can be dispersed in water in the presence of the water-soluble or dispersible binders (b1) come from the oligomer and/or polymer classes described below, with the proviso that they contain so little, if any at all, of the hydrophilic functional groups (i), (ii) or (iii) described below that no solubility or dispersibility in water results.

20

The suitable water-soluble or dispersible binders (a11) are oligomeric or polymeric resins. The binders (a11) are physically drying or else contain functional groups which are able to react with the crosslinking agents (a14), (a25) or (b3) described below.

25

Examples of suitable functional groups are amino, thio, carbonate, epoxide and/or hydroxyl groups, of which the hydroxyl groups are particularly advantageous and are

therefore particularly preferred in accordance with the invention.

Examples of suitable inventively preferred binders
5 (all) are linear and/or branched and/or block, comb
and/or random poly(meth)acrylates or acrylate addition
copolymers, polyesters, alkyds, amino resins, poly-
urethanes, acrylated polyurethanes, acrylated poly-
esters, polylactones, polycarbonates, polyethers, epoxy
10 resin-amine adducts, (meth)acrylated diols, partially
saponified polyvinyl esters or polyureas, of which the
acrylate addition copolymers, the polyesters, the poly-
urethanes, the polyethers, and the epoxy resin-amine
adducts are particularly advantageous and are therefore
15 used with particular preference.

As regards the preparability, handling, and
particularly advantageous properties of the coating
materials of the invention prepared therewith, the
20 acrylate addition copolymers, the polyesters and/or the
polyurethanes (all), but especially the polyurethanes
(all), offer very particular advantages, and so are
used with very particular preference in accordance with
the invention.

25

Preferably, the binders (all) per se are soluble or
dispersible in water.

Examples of suitable water-soluble or -dispersible binders (all) contain alternatively

- 5 (i) functional groups which can be converted into cations by neutralizing agents and/or quaternizing agents, and/or cationic groups

or

- 10 (ii) functional groups which can be converted into anions by neutralizing agents, and/or anionic groups

and/or

- 15 (iii) nonionic hydrophilic groups.

Examples of suitable functional groups (i) for use in accordance with the invention that can be converted into cations by neutralizing agents and/or quaternizing agents are primary, secondary or tertiary amino groups, secondary sulfide groups or tertiary phosphine groups, especially tertiary amino groups or secondary sulfide groups.

- 25 Examples of suitable cationic groups (i) for use in accordance with the invention are primary, secondary, tertiary or quaternary ammonium groups, tertiary sulfonium groups or quaternary phosphonium groups, preferably quaternary ammonium groups or tertiary

sulfonium groups, but especially tertiary sulfonium groups.

5 Examples of suitable functional groups (ii) for use in accordance with the invention that can be converted into anions by neutralizing agents are carboxylic acid, sulfonic acid or phosphonic acid groups, especially carboxylic acid groups.

10 Examples of suitable anionic groups (ii) for use in accordance with the invention are carboxylate, sulfonate or phosphonate groups, especially carboxylate groups.

15 Examples of suitable nonionic hydrophilic groups (iii) for use in accordance with the invention are polyether groups, especially poly(alkylene ether) groups.

The selection of the groups (i) or (ii) is to be made
20 so as to rule out the possibility of any disruptive reactions with the functional groups which are able to react with the crosslinking agents (a14), (a25) or (b3) described below. The skilled worker will therefore be able to make the selection in a simple way on the basis
25 of his or her knowledge in the art.

Examples of suitable neutralizing agents for functional groups (i) convertible into cations are inorganic and organic acids such as sulfuric acid, hydrochloric acid,

phosphoric acid, formic acid, acetic acid, lactic acid, dimethylolpropionic acid or citric acid.

Examples of suitable neutralizing agents for functional groups (ii) convertible into anions are ammonia, ammonium salts, such as ammonium carbonate or ammonium hydrogen carbonate, for example, and also amines, such as trimethylamine, triethylamine, tributylamine, dimethylaniline, diethylaniline, triphenylamine, dimethylethanolamine, diethylethanolamine, methyl-diethanolamine, triethanolamine, and the like. Neutralization may take place in organic phase or in aqueous phase. Dimethylethanolamine is a preferred neutralizing agent.

In general the amount of neutralizing agent is chosen is [sic] so that from 1 to 100 equivalents, preferably from 50 to 90 equivalents, of the functional groups (i) or (ii) of the binder (all) are neutralized.

As regards the preparability, handling, and particularly advantageous properties of the coating materials and modular systems of the invention that are prepared therewith, the binders (all) which contain the anion-forming groups and/or anions (ii), especially the carboxylic acid and/or carboxylate groups, offer very particular advantages, and so are used with very particular preference in accordance with the invention.

In accordance with the invention it is of advantage if the binders (all) have a number-average molecular weight M_n of from 750 to 2,000,000, preferably from 750 to 1,000,000, with particular preference from 750 to 500,000, and in particular from 750 to 300,000 daltons, a molecular weight polydispersity U of from 1.0 to 10, preferably from 1.0 to 8, with particular preference from 1.0 to 6, and in particular from 1.0 to 4 if ionic stabilization is desired, an acid number of from 10 to 150, preferably from 15 to 100, with particular preference from 20 to 80, and in particular from 25 to 70 mg KOH/g, and, where hydroxyl groups are present, an OH number of from 10 to 350, preferably from 15 to 250, with particular preference from 20 to 200, and in particular from 25 to 150 mg KOH/g.

Within the abovementioned, very particularly advantageous range of the number-average molecular weight M_n , from 750 to 300,000 daltons, the range from 750 to 30,000 daltons is deserving of emphasis since binders (all) having such a number-average molecular weight M_n offer additional advantages in terms of the performance properties of the resultant base colors (A1). Further advantages arise if the binders (all) have a number-average molecular weight M_n of from 850 to 20,000 daltons and in particular from 950 to 15,000 daltons [sic].

Examples of very particularly preferred binders (a11) for use in accordance with the invention are

5 (a111) the acrylate addition copolymers (a11) described below and containing carboxylic acid and/or carboxylate groups and optionally hydroxyl groups,

10 (a112) the polyester resins (a11) described below and containing carboxylic acid and/or carboxylate groups and optionally hydroxyl groups, and/or

15 (a113) the polyurethane resins (a11) described below and containing carboxylic acid and/or carboxylate [sic] groups and optionally hydroxyl groups.

Use is made in particular of acrylate addition copolymers (a111) obtainable in the presence of at least
20 one polymerization initiator by addition polymerization in bulk, by solution polymerization in an organic solvent or a solvent mixture, by emulsion polymerization or by precipitation polymerization in water of

25 m1) a (meth)acrylic ester which is different from but copolymerizable with (m2), (m3), (m4), (m5), and (m6) and is substantially free from acid groups, or a mixture of such monomers,

- m2) an ethylenically unsaturated monomer which is copolymerizable with (m1), (m3), (m4), (m5), and (m6) but different from (m5), carries at least one hydroxyl group per molecule, and is substantially free from acid groups, or a mixture of such monomers,
- m3) an ethylenically unsaturated monomer which is copolymerizable with (m1), (m2), (m4), (m5), and (m6) and carries per molecule at least one acid group which can be converted into the corresponding acid anion groups, or a mixture of such monomers, and
- m4) if desired, one or more vinyl esters of alpha-branched monocarboxylic acids having 5 to 18 carbon atoms per molecule, and/or
- m5) if desired, at least one reaction product of acrylic acid and/or methacrylic acid with the glycidyl ester of an alpha-branched monocarboxylic acid having 5 to 18 carbon atoms per molecule or, instead of the reaction product, an equivalent amount of acrylic and/or methacrylic acid which is then reacted, during or after the polymerization reaction, with the glycidyl ester of an alpha-branched monocarboxylic acid having 5 to 18 carbon atoms per molecule,

m6) if desired, an ethylenically unsaturated monomer which is copolymerizable with (m1), (m2), (m3), (m4), and (m5) but different from (m1), (m2), (m4), and (m5), and is substantially free from
5 acid groups, or a mixture of such monomers,

the nature and amount of (m1), (m2), (m3), (m4), (m5), and (m6) being selected such that the polyacrylate resin (b1) has the desired OH number, acid number, and
10 molecular weight.

To prepare the acrylate copolymers (a111), the monomer (m1) used may comprise any (meth)acrylic alkyl or cycloalkyl ester having up to 20 carbon atoms in the
15 alkyl radical that is copolymerizable with (m2), (m3), (m4), (m5), and (m6), especially methyl, ethyl, propyl, n-butyl, sec-butyl, tert-butyl, hexyl, ethylhexyl, stearyl, and lauryl acrylate or methacrylate; cyclo-
aliphatic (meth)acrylic esters, especially cyclohexyl, isobornyl, dicyclopentadienyl, octahydro-4,7-methano-
20 1H-indene methanol or tert-butylcyclohexyl (meth)-acrylate; (meth)acrylic acid oxaalkyl or oxacycloalkyl esters such as ethyl triglycol (meth)acrylate and methoxyoligoglycol (meth)acrylate having a molecular
25 weight Mn of preferably 550; or other ethoxylated and/or propoxylated, hydroxyl-free (meth)acrylic acid derivatives. These monomers may include minor amounts of relatively highly functional (meth)acrylic acid alkyl or cycloalkyl esters, such as ethylene glycol,

propylene glycol, diethylene glycol, dipropylene glycol, butylene glycol, pentane-1,5-diol, hexane-1,6-diol, octahydro-4,7-methano-1H-indenedimethanol or cyclohexane-1,2-, -1,3- or -1,4-diol di(meth)acrylate; 5 trimethylolpropane di- or tri(meth)acrylate; or pentaerythritol di-, tri- or tetra(meth)acrylate. In the context of the present invention, minor amounts of relatively highly functional monomers are those amounts which do not lead to crosslinking or gelling of the 10 polyacrylate resins.

As component (m2) it is possible to use ethylenically unsaturated monomers copolymerizable with (m1), (m2), (m3), (m4), (m5), and (m6) but different from (m5) 15 which carry per molecule at least one hydroxyl group and are substantially free from acid groups, such as hydroxyalkyl esters of acrylic acid, methacrylic acid or another alpha,beta-ethylenically unsaturated carboxylic acid which are derived from an alkylene glycol 20 which is esterified with the acid or are obtainable by reacting the acid with an alkylene oxide, especially hydroxyalkyl esters of acrylic acid, methacrylic acid, ethacrylic acid, crotonic acid, maleic acid, fumaric acid or itaconic acid in which the hydroxyalkyl group 25 contains up to 20 carbon atoms, such as 2-hydroxyethyl, 2-hydroxypropyl, 3-hydroxypropyl, 3-hydroxybutyl, 4-hydroxybutyl acrylate, methacrylate, ethacrylate, crotonate, maleate, fumarate or itaconate; 1,4-bis-(hydroxymethyl)cyclohexane, octahydro-4,7-methano-1H-

indenedimethanol or methylpropanediol monoacrylate, monomethacrylate, monoethacrylate, monocrotonate, monomaleate, monofumarate or monoitaconate; or reaction products of cyclic esters, such as epsilon-caprolactone, for example, and these hydroxyalkyl esters; or olefinically unsaturated alcohols such as allyl alcohol or polyols such as trimethylolpropane monoallyl or diallyl ether or pentaerythritol monoallyl, diallyl or triallyl ether. With regard to these

10 relatively highly functional monomers (m2), the comments made regarding the relatively highly functional monomers (a1) [sic] apply accordingly. The fraction of trimethylolpropane monoallyl ether is customarily from 2 to 10% by weight, based on the

15 overall weight of the monomers (m1) to (m6) used to prepare the polyacrylate resin. In addition, however, it is also possible to add from 2 to 10% by weight, based on the overall weight of the monomers used to prepare the polyacrylate resin, of trimethylolpropane

20 monoallyl ether to the finished polyacrylate resin. The olefinically unsaturated polyols, such as trimethylolpropane monoallyl ether in particular, may be used as sole hydroxyl-containing monomers, but in particular may be used proportionally in combination with other of

25 the hydroxyl-containing monomers mentioned.

As component (m3) it is possible to use any ethylenically unsaturated monomer which carries per molecule at least one acid group, preferably a carboxyl group,

and is copolymerizable with (m1), (m2), (m4), (m5), and (m6), or a mixture of such monomers (m3). As component (m3) it is particularly preferred to use acrylic acid and/or methacrylic acid. However, it is also possible

5 to use other ethylenically unsaturated carboxylic acids having up to 6 carbon atoms in the molecule. Examples of such acids are ethacrylic acid, crotonic acid, maleic acid, fumaric acid, and itaconic acid. It is also possible to use ethylenically unsaturated sulfonic

10 or phosphonic acids, and/or their partial esters, as component (m3). Also suitable as component (m3) are the mono(meth)acryloyloxyethyl esters of maleic acid, succinic acid, and phthalic acid.

15 As component (m4), use is made of one or more vinyl esters of alpha-branched monocarboxylic acids having 5 to 18 carbon atoms in the molecule. The branched monocarboxylic acids may be obtained by reacting formic acid or carbon monoxide and water with olefins in the

20 presence of a liquid, strongly acidic catalyst; the olefins may be cracking products of paraffinic hydrocarbons, such as mineral oil fractions, and may comprise both branched and straight-chain acyclic and/or cycloaliphatic olefins. The reaction of such

25 olefins with formic acid or with carbon monoxide and water results in a mixture of carboxylic acids in which the carboxyl groups are located predominantly on a quaternary carbon atom. Examples of other olefinic starting materials are propylene trimer, propylene

tetramer, and diisobutylene. Alternatively, the vinyl esters may be prepared from the acids in a manner known per se, for example, by reacting the acid with acetylene. Particular preference - owing to their ready
5 availability - is given to the use of vinyl esters of saturated aliphatic monocarboxylic acids having 9 to 11 carbon atoms with branching on the alpha carbon atom.

As component (m5), use is made of the reaction product
10 of acrylic acid and/or methacrylic acid with the glycidyl ester of an alpha-branched monocarboxylic acid having 5 to 18 carbon atoms per molecule. Glycidyl esters of highly branched monocarboxylic acids are available under the tradename "Cardura". The reaction
15 of the acrylic or methacrylic acid with the glycidyl ester of a carboxylic acid having a tertiary alpha carbon atom may take place before, during or after the polymerization reaction. As component (m5) it is preferred to use the reaction product of acrylic and/or
20 methacrylic acid with the glycidyl ester of Versatic acid. This glycidyl ester is available commercially under the name "Cardura E10".

As monomers (m6) it is possible to use all
25 ethylenically unsaturated monomers which are copolymerizable with (m1), (m2), (m3), (m4), and (m5), different from (m1), (m2), (m3), and (m4), and substantially free from acid groups, or mixtures of such monomers. Suitable monomers (m6) include

- olefins such as ethylene, propylene, but-1-ene, pent-1-ene, hex-1-ene, cyclohexene, cyclopentene, norbornene [sic], butadiene, isoprene, cyclopentadiene and/or dicyclopentadiene;
- 5
- (meth)acrylamides such as (meth)acrylamide, N-methyl-, N,N-dimethyl-, N-ethyl-, N,N-diethyl-, N-propyl-, N,N-dipropyl-, N-butyl-, N,N-dibutyl-, N-cyclohexyl- and/or N-cyclohexyl-N-methyl-(meth)-
- 10 acrylamide;
- monomers containing epoxide groups, such as the glycidyl ester of acrylic acid, methacrylic acid, ethacrylic acid, crotonic acid, maleic acid,
- 15 fumaric acid and/or itaconic acid;
- vinylaromatic hydrocarbons, such as styrene, alpha-alkylstyrenes, especially alpha-methylstyrene, and/or vinyltoluene;
- 20
- nitriles such as acrylonitrile and/or methacrylonitrile;
- 25
- vinyl compounds such as vinyl chloride, vinyl fluoride, vinylidene dichloride, vinylidene difluoride; N-vinylpyrrolidone; vinyl ethers such as ethyl vinyl ether, n-propyl vinyl ether, isopropyl vinyl ether, n-butyl vinyl ether, isobutyl vinyl ether and/or vinyl cyclohexyl ether; vinyl

esters such as vinyl acetate, vinyl propionate, vinyl butyrate, vinyl pivalate and/or the vinyl ester of 2-methyl-2-ethylheptanoic acid; and/or

- 5 - polysiloxane macromonomers having a number-average molecular weight M_n of from 1 000 to 40 000, preferably from 2 000 to 20 000, with particular preference from 2 500 to 10 000, and in particular from 3 000 to 7 000, and containing on average
10 from 0.5 to 2.5, preferably from 0.5 to 1.5, ethylenically unsaturated double bonds per molecule, as described in DE-A 38 07 571 on pages 5 to 7, in DE-A 37 06 095 in columns 3 to 7, in EP-B-0 358 153 on pages 3 to 6, in US-A 4,754,014
15 in columns 5 to 9, in DE-A 44 21 823 or in the international patent application WO 92/22615 on page 12 line 18 to page 18 line 10, or acryloyloxysilane-containing vinyl monomers, preparable by reacting hydroxy-functional silanes
20 with epichlorohydrin and then reacting the reaction product with methacrylic acid and/or hydroxyalkyl esters of (meth)acrylic acid.

It is preferred to use vinylaromatic hydrocarbons (m6).

25

The nature and amount of the monomers (m1) to (m6) are selected such that the finely divided, solid acrylate copolymer (a11) has the desired OH number, acid number, and glass transition temperature.

Viewed in terms of its method, the preparation of the acrylate copolymers (a111) used in accordance with the invention has no special features but instead takes place in accordance with the customary and known techniques of copolymerization in bulk, solution or emulsion or by suspension or precipitation polymerization.

For the preparation of the acrylate copolymers (a111) used with preference in accordance with the invention it is advantageous to use polymerization initiators.

Examples of suitable polymerization initiators are initiators which form free radicals, such as tert-butyl peroxyethylhexanoate, benzoyl peroxide, di-tert-amyl peroxide, azobisisobutyronitrile, and tert-butyl perbenzoate, for example. The initiators are used preferably in an amount of from 1 to 25% by weight, with particular preference from 2 to 10% by weight, based on the overall weight of the monomers.

The polymerization is appropriately conducted at a temperature of from 80 to 200°C, preferably from 110 to 180°C.

The acrylate copolymer (a111) is preferably prepared by a two-stage process, since in this way the resulting novel coating materials have better processing

properties. It is therefore preferred to use acrylate copolymers (b11) [sic] obtainable by

1. polymerizing a mixture of the monomers (m1), (m2),
5 (m4), (m5), and (m6), or a mixture of portions of the monomers (m1), (m2), (m4), (m5), and (m6), in an organic solvent,
2. after at least 60% by weight of the mixture
10 consisting of the monomers (m1), (m2), (m4), (m5) and, if used, (m6) have been added, adding (m3) and any remainder of the monomers (m1), (m2), (m4), (m5), and (m6), and continuing polymerization, and
3. after the end of the polymerization, if desired,
15 at least partially neutralizing the polyacrylate resin obtained, i.e., converting the acid groups into the corresponding acid anion groups.

20 Besides this, however, it is also possible to introduce the monomers (m4) and/or (m5) together with at least one portion of the solvent and to meter the remaining monomers into this initial charge. Furthermore, it is
25 also possible for only part of the monomers (m4) and/or (m5) to be included in the initial charge, together with at least one portion of the solvent, and for the remainder of these monomers to be added as described above. Preferably, for example, at least 20% by weight

of the solvent and approximately 10% by weight of the monomers (m4) and (m5), and also, if desired, portions of the monomers (m1) and (m6), are introduced initially.

5

Preference is further given to preparing the acrylate copolymers (a111) by a two-stage process in which the first stage lasts for from 1 to 8 hours, preferably from 1.5 to 4 hours, and the addition of the mixture of (m3) and any remainder of the monomers (m1), (m2), (m4), (m5), and (m6) is made over the course of from 20 to 120 minutes, preferably over the course of from 30 to 90 minutes. After the end of the addition of the mixture of (m3) and any remainder of the monomers (m1), (m2), (m4), (m5), and (m6), polymerization is continued until all the monomers used have undergone substantially complete reaction. In this procedure, the second stage may immediately follow the first. Alternatively, the second stage may not be commenced until after a certain time has elapsed, for example, after from 10 minutes to 10 hours.

The amount and rate of addition of the initiator are preferably chosen so as to give a polyacrylate resin (a111) having the desired number-average molecular weight M_n . It is preferred to commence the initiator feed a certain time, generally about 15 minutes, before the feed of the monomers. Preference is further given to a process in which the addition of initiator is

commenced at the same point in time as the addition of the monomers and ended about half an hour after the addition of the monomers has ended. The initiator is preferably added in a constant amount per unit time.

- 5 After the end of the initiator addition, the reaction mixture is held at polymerization temperature until (generally 1.5 hours) all of the monomers used have undergone substantially complete reaction. The term "substantially complete reaction" is intended to denote
- 10 that preferably 100% by weight of the monomers used have been reacted but that it is also possible for a small residual monomer content of not more than about 0.5% by weight, based on the weight of the reaction mixture, to remain unreacted.

- 15 Preferably, the monomers for preparing the acrylate copolymers (a111) are polymerized at not too high a polymerization solids, preferably at a polymerization solids of from 80 to 50% by weight, based on the comonomers, and subsequently the solvents are removed
- 20 in part by distillation, so that the resulting acrylate copolymer solutions (a111) have a solids content of preferably from 100 to 60% by weight.

- 25 The preparation of the acrylate copolymers (a111) for use in accordance with the invention is carried out using the methods of continuous or batchwise copolymerization, under atmospheric or superatmospheric pressure, that are known and customary in the polymers

field in stirred tanks, autoclaves, tube reactors or Taylor reactors.

Examples of suitable (co)polymerization processes for
5 the preparation of the acrylate copolymers (all) are
described in the patents DE-A-197 09 465, DE-C-
197 09 476, DE-A-28 48 906, DE-A-195 24 182, EP-A-
0 554 783, WO 95/27742, DE-A-38 41 540, and WO
82/02387.

10

Advantageous reactors are Taylor reactor, especially
for copolymerization in bulk, solution or emulsion.

Taylor reactors, which serve to convert substances
15 under the conditions of Taylor flow, are known. They
consist essentially of two coaxial concentric cylinders
of which the outer is fixed while the inner rotates.
The reaction space is the volume formed by the gap
between the cylinders. Increasing angular velocity ω_1
20 of the inner cylinder is accompanied by a series of
different flow patterns which are characterized by a
dimensionless parameter, known as the Taylor number Ta .
As well as the angular velocity of the stirrer, the
Taylor number is also dependent on the kinematic
25 viscosity ν of the fluid in the gap and on the
geometric parameters, the external radius of the inner
cylinder r_1 , the internal radius of the outer cylinder
 r_0 and the gap width d , the difference between the two
radii, in accordance with the following formula:

$$\tau_a = \omega_i r_i d v^{-1} (d/r_i)^{1/2} \quad (I)$$

where $d = r_o - r_i$.

- 5 At low angular velocity, the laminar Couette flow, a simple shear flow, develops. If the rotary speed of the inner cylinder is increased further, then, above a critical level, alternately contrarotating vortices (rotating in opposition) occur, with axes along the
- 10 peripheral direction. These vortices, called Taylor vortices, are rotationally symmetric and have a diameter which is approximately the same size as the gap width. Two adjacent vortices form a vortex pair or a vortex cell.
- 15 The basis of this behavior is the fact that, in the course of rotation of the inner cylinder with the outer cylinder at rest, the fluid particles that are near to the inner cylinder are subject to a greater centrifugal
- 20 force than those at a greater distance from the inner cylinder. This difference in the acting centrifugal forces displaces the fluid particles from the inner to the outer cylinder. The viscosity force acts counter to the centrifugal force, since for the motion of the
- 25 fluid particles it is necessary to overcome the friction. If there is an increase in the rotary speed, there is also an increase in the centrifugal force. The Taylor vortices are formed when the centrifugal force exceeds the stabilizing viscosity force.

In the case of Taylor flow with a low axial flow, each vortex pair passes through the gap, with only a low level of mass transfer between adjacent vortex pairs. Mixing within such vortex pairs is very high, whereas
5 axial mixing beyond the pair boundaries is very low. A vortex pair may therefore be regarded as a stirred tank in which there is thorough mixing. Consequently, the flow system behaves as an ideal flow tube in that the vortex pairs pass through the gap with constant
10 residence time, like ideal stirred tanks.

Of advantage in accordance with the invention here are Taylor reactors having an external reactor wall within which there is a concentrically or eccentrically
15 disposed rotor, a reactor floor and a reactor lid, which together define the annular reactor volume, at least one means for metered addition of reactants, and a means for the discharge of product, where the reactor wall and/or the rotor are or is geometrically designed
20 in such a way that the conditions for Taylor vortex flow are met over substantially the entire reactor length in the reactor volume, i.e. in such a way that the annular gap broadens in the direction of flow traversal.

25

Examples of suitable polyester resins (all2) are known from the patents DE-A-29 26 584, DE-A-38 32 142, and EP-A-0 301 300. They are obtainable by reacting

- p1) optionally sulfonated polycarboxylic acids or their esterifiable derivatives, together if desired with monocarboxylic acids,
- 5 p2) polyols, together if desired with monoools,
- p3) optionally, further modifying components, and
- p4) optionally, a component which is reactive with the
- 10 reaction product of (p1), (p2) and, where used, (p3).

Examples of polycarboxylic acids which may be used as component (p1) are aromatic, aliphatic, and cyclo-

15 aliphatic polycarboxylic acids. As component (p1) it is preferred to use aromatic and/or aliphatic polycarboxylic acids.

Examples of suitable polycarboxylic acids are phthalic

20 acid, isophthalic acid, terephthalic acid, phthalic, isophthalic or terephthalic monosulfonate, halophthalic acids, such as tetrachloro- and/or tetrabromophthalic acid, adipic acid, glutaric acid, azelaic acid, sebacic acid, fumaric acid, maleic acid, trimellitic acid,

25 pyromellitic acid, tetrahydrophthalic acid, hexahydrophthalic acid, 1,2-cyclohexanedicarboxylic acid, 1,3-cyclohexanedicarboxylic acid, 1,4-cyclohexanedicarboxylic acid, 4-methylhexahydrophthalic acid, endomethylenetetrahydrophthalic acid, tricyclodecanedicarboxylic

acid, endoethylenehexahydrophthalic acid, camphoric acid, cyclohexanetetra-carboxylic acid or cyclobutane-tetracarboxylic acid. The cycloaliphatic polycarboxylic acids may be used both in their cis form and in their
5 trans form and also as a mixture of both forms. Also suitable are the esterifiable derivatives of the abovementioned polycarboxylic acids, such as, for example, their monoesters or polyesters with aliphatic alcohols having from 1 to 4 carbon atoms or hydroxy
10 alcohols having from 1 to 4 carbon atoms. It is also possible, furthermore, to use the anhydrides of the abovementioned acids, where they exist.

If desired, it is possible together with the
15 polycarboxylic acids to use monocarboxylic acids, such as benzoic acid, tert-butylbenzoic acid, lauric acid, isononanoic acid, and fatty acids of naturally occurring oils, for example. A preferred monocarboxylic acid used is isononanoic acid.

20

Suitable alcohol components (p2) for preparing the polyester (all2) are polyhydric alcohols, such as ethylene glycol, propanediols, butanediols, hexane-diols, neopentyl hydroxypivalate, neopentyl glycol,
25 diethylene glycol, cyclohexanediol, cyclohexane-dimethanol, trimethylpentanediol, ethylbutylpropane-diol, ditrimethylolpropane, trimethylolethane, tri-methylolpropane, glycerol, pentaerythritol, dipenta-erythritol, trishydroxyethyl isocyanate, polyethylene

glycol, polypropylene glycol, alone or together with monohydric alcohols, such as butanol, octanol, lauryl alcohol, cyclohexanol, tert-butylcyclohexanol, and ethoxylated and/or propoxylated phenols, for example.

5

Particularly suitable components (p3) for preparing the polyesters (a112) are compounds having a group which is reactive toward the functional groups of the polyester, with the exception of the compounds mentioned as component (p4). As modifying component (p3) it is preferred to use polyisocyanates and/or diepoxide compounds, and possibly monoisocyanates and/or monoepoxide compounds as well. Suitable components (p3) are described, for example, in DE-A-40 24 204 on page 4 lines 4 to 9.

Suitable components (p4) for preparing the polyester resins (a112) are compounds which besides a group which is reactive toward the functional groups of the polyester (b12) additionally contain a tertiary amino group, examples being monoisocyanates containing at least one tertiary amino group or mercapto compounds containing at least one tertiary amino group. For details, refer to DE-A-40 24 204, page 4 lines 10 to 49.

The polyester resins (a112) are prepared by the known methods of esterification, as described for example in DE-A-40 24 204, page 4 lines 50 to 65. The reaction

takes place normally at temperatures between 180 and 280°C, in the presence or absence of an appropriate esterification catalyst, such as lithium octoate, dibutyltin oxide, dibutyltin dilaurate or para-toluene-sulfonic acid, for example.

The preparation of the polyester resins (a112) is customarily conducted in the presence of small amounts of an appropriate solvent as azeotrope former. Examples of azeotrope formers used include aromatic hydrocarbons, such as xylene in particular, and (cyclo)-aliphatic hydrocarbons, e.g., cyclohexane or methylcyclohexane.

Particular preference is given to using polyester resins (a112) prepared by a two-stage process by first preparing a hydroxyl-containing polyester having an OH number of from 100 to 300 mg KOH/g, an acid number of less than 10 mg KOH/g, and a number-average molecular weight Mn of from 500 to 2000 daltons and then reacting this polyester in a second stage with carboxylic anhydrides, to give the desired polyester resin (a112). The amount of carboxylic anhydrides in this case is chosen such that the resulting polyester resin (a112) has the desired acid number. Anhydrides suitable for this reaction are all commonly used acid anhydrides, such as hexahydrophthalic anhydride, trimellitic anhydride, pyromellitic anhydride, phthalic anhydride, camphoric anhydride, tetrahydrophthalic anhydride,

succinic anhydride, and mixtures of these and/or other anhydrides and, in particular, anhydrides [sic] of aromatic polycarboxylic acids, such as trimellitic anhydride.

5

It is possible if desired for the acrylate copolymer (a111) to have been prepared at least partly in the presence of the polyester resin (a112). In this case it is advantageous to prepare at least 20% by weight and with particular advantage from 40 to 80% by weight of the acrylate copolymer (a111) in the presence of the polyester resin (a112). Any remainder of the acrylate copolymer (a111) is added subsequently to the module (I). In this context it is possible for this resin, already polymerized, to have the same monomer composition as the acrylate copolymer (a111) synthesized in the presence of the polyester resin (a112). It is, however, also possible to add a hydroxyl-containing acrylate copolymer (a111) having a different monomer composition. A further possibility is to add a mixture of different acrylate copolymer [sic] (a111) and/or polyester resins (a112), with possibly one resin having the same monomer composition as the acrylate copolymer (a111) synthesized in the presence of the polyester resin (a112).

Suitable polyurethane resins (a113) for use in accordance with the invention, containing acid groups and also, where appropriate, hydroxyl groups, are

described, for example, in the following documents: EP-

A-0 089 497, EP-A-0 158 099, EP-A-0 195 931, EP-A-

0 354 261, EP-A-0 422 357, EP-A-0 424 705, EP-A-

0 355 433, DE-A-35 45 618, DE-A-38 13 866, DE-A-

5 32 10 051, DE-A-26 24 442, DE-A-37 39 332, DE-A-

36 28 124, DE-A-29 26 584, DE-A-33 21 180, DE-A-

38 13 866, DE-A-40 05 961, US-A-4,719,132, US-A-

4,558,090, and US-A-4,489,135.

10 Use is made in particular of polyurethane resins
(a113), which are preparable by reacting isocyanato-
containing prepolymers with compounds that are reactive
toward isocyanate groups.

15 Prepolymers containing isocyanate groups may be
prepared by reacting polyols having a hydroxyl number
of from 10 to 1800, preferably from 50 to 1200 mg KOH/g
with excess polyisocyanates at temperatures of up to
150°C, preferably from 50 to 130°C, in organic solvents
20 which cannot react with isocyanates. The equivalents
ratio of NCO groups to OH groups is between 2.0 : 1.0
and > 1.0 : 1.0, preferably between 1.4 : 1 and
1.1 : 1.

25 The polyols used to prepare the prepolymer may be of
low and/or high molecular mass and may contain groups
which are slow to react and are anionic, or are capable
of forming anions. It is also possible to use low
molecular mass polyols having a molecular weight of


from 60 up to 400 daltons to prepare the isocyanato-containing prepolymers. In this case amounts of up to 30% by weight of the total polyol constituents, preferably from about 2 to 20% by weight, are used.

5

In order to obtain an NCO prepolymer of high flexibility, a high proportion of a predominantly linear polyol having a preferred OH number of from 30 to 150 mg KOH/g should be added. Up to 97% by weight of the overall polyol may consist of saturated and unsaturated polyesters and/or polyethers having a number-average molecular weight M_n of from 400 to 5000 daltons. The selected polyetherdiols should not introduce excessive amounts of ether groups, since otherwise the polymers formed start to swell in water. Polyesterdiols are prepared by esterifying organic dicarboxylic acids or their anhydrides with organic diols or are derived from a hydroxycarboxylic acid or a lactone. In order to prepare branched polyesterpolyols, it is possible to a minor extent to use polyols or polycarboxylic acids having a higher functionality.

With preference, at least a certain fraction of the alcohol component used to prepare the polyurethane resins (all3) comprises


u₁) at least one diol of the formula 1



5 in which R_1 and R_2 each represent an identical or different radical and are an alkyl radical having from 1 to 18 carbon atoms, an aryl radical or a cycloaliphatic radical, with the proviso that R_1 and/or R_2 must not be methyl, and/or

10

u_2) at least one diol of the formula 2



15 in which R_3 , R_4 , R_6 and R_7 each represent identical or different radicals and are an alkyl radical having from 1 to 6 carbon atoms, a cycloalkyl radical or an aryl radical and R_5 is an alkyl radical having from 1 to 6 carbon atoms, an aryl radical or an unsaturated alkyl radical having
20 from 1 to 6 carbon atoms, and n is either 0 or 1.

Suitable diols (u_1) include all propanediols of the formula 1 in which either R_1 or R_2 or R_1 and R_2 is or
25 are not methyl, such as, for example

2-butyl-2-ethyl-1,3-propanediol, 2-butyl-2-methyl-1,3-propanediol, 2-phenyl-2-methyl-1,3-propanediol, 2-propyl-2-ethyl-1,3-propanediol, 2-di-tert-butyl-1,3-propanediol, 2-butyl-2-propyl-1,3-propanediol, 1-dihydroxymethylbicyclo[2.2.1]heptane, 2,2-diethyl-1,3-propanediol, 2,2-dipropyl-1,3-propanediol or 2-cyclohexyl-2-methyl-1,3-propanediol.

Diols (u_2) of the general formula 2 that may be used include, for example, 2,5-dimethyl-2,5-hexanediol, 2,5-diethyl-2,5-hexanediol, 2-ethyl-5-methyl-2,5-hexanediol, 2,4-dimethyl-2,4-pentanediol, 2,3-dimethyl-2,3-butanediol, 1,4-(2'-hydroxypropyl)benzene [sic], and 1,3-(2'-hydroxypropyl)benzene [sic].

Preferred diols (u_1) used include 2-propyl-2-ethyl-1,3-propanediol, 2,2-diethyl-1,3-propanediol, 2-butyl-2-ethyl-1,3-propanediol, and 2-phenyl-2-ethyl-1,3-propanediol, and preferred components (u_2) used comprise 2,3-dimethyl-2,3-butanediol and 2,5-dimethyl-2,5-hexanediol. As component (a_1) [sic] it is particularly preferred to use 2-butyl-2-ethyl-1,3-propanediol and also 2-phenyl-2-ethyl-1,3-propanediol, and as component (u_2) it is particularly preferred to use 2,5-dimethyl-2,5-hexanediol.

The diols (u_1) and/or (u_2) are usually used in an amount of from 0.5 to 15% by weight, preferably from 1 to 7% by weight, based in each case on the overall weight of

the synthesis components used to prepare the polyurethane resins (a113).


Typical polyfunctional isocyanates used to prepare the
5 polyurethane resins (a113) are aliphatic, cyclo-
aliphatic and/or aromatic polyisocyanates containing at
least two isocyanate groups per molecule. Preference is
given to the isomers or isomer mixtures of organic
diisocyanates. Owing to their good resistance to
10 ultraviolet light, (cyclo)aliphatic diisocyanates give
products having little tendency to yellow. The
polyisocyanate component used to form the prepolymer
may also include a fraction of polyisocyanates of
higher functionality, provided that this does not cause
15 any gelling. Products which have established themselves
as triisocyanates are those formed by trimerization or
oligomerization of diisocyanates or by reaction of
diisocyanates with polyfunctional compounds containing
OH or NH groups. The average functionality may be
20 reduced if desired by adding monoisocyanates.

Examples of polyisocyanates that may be used include
phenylene diisocyanate, tolylene diisocyanate, xylylene
diisocyanate, bisphenylene diisocyanate, naphthylene
25 diisocyanate, diphenylmethane diisocyanate, isophorone
diisocyanate, cyclobutane diisocyanate, cyclopentylene
diisocyanate, cyclohexylene diisocyanate, methylcyclo-
hexylene diisocyanate, dicyclohexylmethane diiso-
cyanate, ethylene diisocyanate, trimethylene diiso-

cyanate, tetramethylene diisocyanate, pentamethylene diisocyanate, hexamethylene diisocyanate, propylene diisocyanate, ethylethylene diisocyanate, and trimethylhexane diisocyanate.

5

To prepare high-solids polyurethane resin solutions (b13) use is made in particular of diisocyanates of the general formula 3



10

where X is a divalent, aromatic hydrocarbon radical, preferably an optionally halogen-, methyl- or methoxy-substituted naphthylene, diphenylene or 1,2-, 1,3- or 1,4-phenylene radical, with particular preference a 1,3-phenylene radical, and R₁ and R₂ are an alkyl radical having 1 - 4 carbon atoms, preferably a methyl radical. Diisocyanates of the general formula 3 are known (their preparation is described, for example, in EP-A-101 832, US-A-3,290,350, US-A-4,130,577, and US-A-4,439,616) and some are available commercially (1,3-bis(2-isocyanatoprop-2-yl)benzene, for example, is sold by the American Cyanamid Company under the tradename TMXDI (META)[®]).

Further preferred polyisocyanate compounds include diisocyanates of the formula 4:



5

where: R is a divalent alkyl or aralkyl radical
 having from 3 to 20 carbon atoms, and
 R' is a divalent alkyl or aralkyl
 radical having from 1 to 20 carbon
 atoms;

10

especially 1-isocyanato-2-(3-isocyanatoprop-1-yl)cyclo-
 hexane.

15 Polyurethanes generally speaking are incompatible with
 water unless specific constituents are incorporated
 and/or particular preparation steps performed in the
 case of their synthesis. For preparing the polyurethane
 resins (a113), then, it is possible to use compounds
 20 which contain at least two isocyanate-reactive H-active
 groups and at least one group which ensures dispers-
 ibility in water. Suitable such groups are the above-
 described nonionic groups (iii) (e.g., polyethers), the
 above-described anionic groups (ii), mixtures of these
 25 two groups, or the above-described cationic groups (i).

Accordingly it is possible to incorporate into the polyurethane resin (a113) an acid number which is sufficiently great that the neutralized product can be dispersed stably in water. Compounds useful for this purpose contain at least one isocyanate-reactive group and at least one group (ii) capable of forming anions. Suitable isocyanate-reactive groups are, in particular, hydroxyl groups and also primary and/or secondary amino groups. Groups (ii) capable of forming anions are carboxyl, sulfonic acid and/or phosphonic acid groups. It is preferred to use alkanolic acids having two substituents on the alpha carbon atom. The substituent may be a hydroxyl group, an alkyl group or an alkylol group. These polyols have at least one, generally from 1 to 3, carboxyl groups in the molecule. They have from 2 to about 25, preferably from 3 to 10, carbon atoms. The polyol containing carboxyl groups (ii) may account for from 3 to 100% by weight, preferably from 5 to 50% by weight, of the overall polyol constituent in the NCO prepolymer.

The amount of ionizable carboxyl groups (ii) that is available as a result of the carboxyl group neutralization in salt form is generally at least 0.4% by weight, preferably at least 0.7% by weight, based on the solids. The upper limit is approximately 12% by weight. The amount of dihydroxyalkanoic acids in the unneutralized prepolymer results in an acid number of at least 5 mg KOH/g, preferably at least 10 mg KOH/g.

At very low acid numbers, it is generally necessary to take further measures to obtain dispersibility in water, for instance by nonionic stabilization with the aid of the above-described functional groups (iii). The upper limit on the acid number is 150 mg KOH/g, preferably 40 mg KOH/g, based on the solids. Preferably, the acid number is situated within the range from 20 to 40 mg KOH/g.

- 10 The isocyanate groups of the isocyanato-containing prepolymer are reacted with a modifier or chain extender. The modifier in this case is preferably added in an amount such that the result is chain extensions and hence increases in molecular weight. Modifiers used
- 15 are preferably organic compounds containing hydroxyl and/or secondary and/or primary amino groups, in particular polyols and/or polyamines having a functionality of two, three and/or more. Examples of polyamines which can be used include ethylenediamine, trimethylenediamine, tetramethylenediamine, penta-
- 20 methylenediamine, hexamethylenediamine, and diethylenetriamine. Examples of polyols which can be used include trimethylolpropane, 1,3,4-butanetriol, glycerol, erythritol, mesoerythritol, arabitol, adon-
- 25 itol, etc. It is preferred to use trimethylolpropane.

The polyurethane resins (a113) for use in accordance with the invention may be grafted with ethylenically unsaturated compounds. Examples of suitable poly-

urethane resins (a113) for use in accordance with the invention and present in the form of graft copolymers are known from the patents EP-A-0 424 705, EP-A-0 521 928, EP-A-0 522 420, EP-A-0 522 419, and EP-A-
5 0 730 613.

To prepare the polyurethane resin (a113) it is preferred first to prepare an isocyanato-containing prepolymer from which the desired polyurethane resin
10 (a113) is then prepared by further reaction, preferably chain extension. The components are reacted in accordance with the well-known techniques of organic chemistry (cf., e.g., Kunststoff Handbuch, volume 7, Polyurethane, edited by Dr. Y. Oertel, Carl Hanser
15 Verlag, Munich, Vienna 1983). Examples of the preparation of the prepolymers are described in DE-A-26 24 442 and DE-A-32 10 051. The polyurethane resins (a113) can be prepared in accordance with the known techniques (e.g., acetone process) or by graft
20 copolymerization, as described in the patents EP-A-0 424 705, EP-A-0 521 928, EP-A-0 522 420, EP-A-0 522 419, and EP-A-0 730 613.

The components are preferably reacted in the customary
25 and known organic solvents. The amount of organic solvents in this case may vary within wide limits and should be sufficient to form a prepolymer solution of appropriate viscosity. In general up to 70% by weight, preferably from 5 to 50% by weight, and with particular

preference less than 20% by weight of solvents, based on the solids, are employed. Accordingly, for example, the reaction may with very particular preference be conducted at a solvent content of 10 - 15% by weight, based on the solids.

The reaction of the components may if desired take place in the presence of a catalyst, such as organotin compounds and/or tertiary amines.

10

To prepare the prepolymers, the amounts of the components are chosen such that the equivalents ratio of NCO groups to OH groups is between 2.0 : 1.0 and > 1.0 : 1.0, preferably between 1.4 : 1 and 1.1 : 1.

15

The NCO prepolymer contains at least about 0.5% by weight of isocyanate groups, preferably at least 1% by weight of NCO, based on the solids. The upper limit is situated at approximately 15% by weight, preferably 10% by weight, with particular preference at 5% by weight of NCO.

20

The water-soluble or -dispersible binders (a11) for use in accordance with the invention may be present individually or as mixtures.

25

If they are to be used in a mixture, care should be taken to be sure not to combine binders (11) [sic] containing functional groups (i) with binders (a11)

containing functional groups (ii), since this may lead to the formation of insoluble polyelectrolyte complexes.

- 5 The further key constituent of the base color (a1) is at least one customary paint pigment (a12). In this context it is possible to use not only the pigments customary in aqueous coating compositions, which do not react with water and/or do not dissolve in water, but
- 10 also the pigments commonly employed in conventional coating compositions. The pigments may consist of inorganic or organic compounds and may impart effect and/or color. Owing to this large number of suitable pigments, therefore, the coating material of the
- 15 invention ensures a universal breadth of use of the coating materials and allows the realization of a large number of color shades and optical effects.

- As effect pigments (a12), it is possible to use metal
- 20 flake pigments such as commercially customary aluminum bronzes, aluminum bronzes chromated in accordance with DE-A-36 36 183, and commercially customary stainless steel bronzes, and also nonmetallic effect pigments, such as pearlescent pigments and interference pigments,
- 25 for example.

Examples of suitable inorganic color pigments are titanium dioxide, iron oxides, Sicotrans yellow, and carbon black.

Examples of suitable organic color pigments are indanthrene blue, Cromophthal red, Irgazine orange, and Heliogen green.

5 The pigments (a12) may be used together with appropriate fillers (a12). It is, however, also possible to use suitable fillers (a12) instead of pigments (a12), provided they possess the appropriate hiding power. Examples of suitable fillers are chalk,
10 calcium sulfates, barium sulfate, silicates such as talc or kaolin, silicas, oxides such as aluminum hydroxide or magnesium hydroxide, nanoparticles, or organic fillers such as textile fibers, cellulose fibers, polyethylene fibers or wood flour.

15 The further key constituent of the base color (A1) is at least one organic solvent (a13), which may also be water-miscible.

20 Examples of suitable organic solvents (a13) are esters, ketones such as acetone or methyl isobutyl ketone, keto esters, glycol ethers such as ethylene, propylene or butylene glycol ethers, glycol esters such as ethylene, propylene or butylene glycol esters, or glycol ether
25 esters such as ethoxyethyl propionate, or amides such as N-methylpyrrolidone or N,N-dimethylacetamide.

Further examples of suitable organic solvents (a13) are those known as reactive diluents, which may participate

in the reaction with the crosslinking agents (a14),
(a25) and/or (b3) described below.

Examples of suitable thermally crosslinkable reactive
5 diluents (a13) are branched, cyclic and/or acyclic C₉-
C₁₆ alkanes which are functionalized with at least two
hydroxyl groups, preferably dialkyloctanediols, in
particular the positionally isomeric diethyl-
octanediols.

10

Further examples of suitable thermally crosslinkable
reactive diluents (a13) are oligomeric polyols which
are obtainable from oligomeric intermediates, them-
selves obtained by metathesis reactions of acyclic
15 monoolefins and cyclic monoolefins, by hydroformylation
and subsequent hydrogenation; examples of suitable
cyclic monoolefins are cyclobutene, cyclopentene,
cyclohexene, cyclooctene, cycloheptene, norbornene [sic]
or 7-oxanorbornene [sic] ; examples of suitable acyclic

20

monoolefins are present in hydrocarbon mixtures
obtained in petroleum processing by cracking (C₅ cut);
examples of suitable oligomeric polyols for inventive
use have a hydroxyl number (OHN) of from 200 to 450, a
number-average molecular weight Mn of from 400 to 1000,
25 and a mass-average molecular weight Mw of from 600 to
1100.

Further examples of suitable thermally crosslinkable
reactive diluents (a13) are hyperbranched compounds

- having a tetrafunctional central group, derived from ditrimethylolpropane, diglycerol, ditrimethylolethane, pentaerythritol, tetrakis(2-hydroxyethyl)methane, tetrakis(3-hydroxypropyl)methane or 2,2-bishydroxy-methyl-1,4-butanediol (homopentaerythritol). These
- 5 reactive diluents may be prepared in accordance with the customary and known methods of preparing hyperbranched and dendrimeric compounds. Suitable synthesis methods are described, for example, in the
- 10 patents WO 93/17060 or WO 96/12754 or in the book by G.R. Newkome, C.N. Moorefield and F. Vögtle, "Dendritic Molecules, Concepts, Syntheses, Perspectives", VCH, Weinheim, New York, 1996.
- 15 Further examples of suitable reactive diluents (a13) are polycarbonatediols, polyesterpolyols, poly(meth)-acrylatediols or hydroxyl-containing polyaddition products.
- 20 Examples of suitable reactive solvents (a13) are butyl glycol, 2-methoxypropanol, n-butanol, methoxybutanol, n-propanol, ethylene glycol monomethyl ether, ethylene glycol monoethyl ether, ethylene glycol monopropyl ether, ethylene glycol monobutyl ether, diethylene
- 25 glycol monomethyl ether, diethylene glycol monoethyl ether, diethylene glycol diethyl ether, diethylene glycol monobutyl ether, trimethylolpropane, ethyl 2-hydroxypropionate or 3-methyl-3-methoxybutanol and also derivatives based on propylene glycol, e.g.,

ethoxyethyl propionate, isopropoxypropanol or methoxypropyl acetate.

Of the abovementioned solvents and reactive diluents
5 (a13), the water-miscible ones are of advantage in accordance with the invention and are therefore used with preference.

The base color (A1) may further comprise crosslinking
10 agents (a14); it is important that the crosslinking agents (a14) do not adversely affect the storage stability of the base color (A1), by premature crosslinking, for instance. The skilled worker will therefore be able to select, simply, the appropriate
15 combinations of crosslinking agents (a14) on the one hand and binders (a11) on the other.

Examples of suitable crosslinking agents (a14) are blocked diisocyanates and/or polyisocyanates.

20

Examples of suitable diisocyanates and/or polyisocyanates for preparing the blocked derivatives (a14) are organic polyisocyanates, especially so-called paint polyisocyanates, containing free isocyanate groups
25 attached to aliphatic, cycloaliphatic, araliphatic and/or aromatic moieties. Preference is given to polyisocyanates containing 2 to 5 isocyanate groups per molecule and having viscosities of from 100 to 10,000, preferably from 100 to 5000, and in particular from

100 to 2000 mPas (at 23°C). If desired, small amounts of organic solvent, preferably from 1 to 25% by weight based on straight polyisocyanate, may be added to the polyisocyanates in order thus to improve the ease of incorporation of the isocyanate and, if appropriate, to lower the viscosity of the polyisocyanate to a level within the abovementioned ranges. Examples of solvents suitable as additives the [sic] polyisocyanates are ethoxyethyl propionate, amyl methyl ketone, and butyl acetate. Additionally, the polyisocyanates may have been hydrophilically or hydrophobically modified in a conventional manner.

Examples of suitable polyisocyanates are described, for example, in "Methoden der organischen Chemie", Houben-Weyl, volume 14/2, 4th Edition, Georg Thieme Verlag, Stuttgart 1963, pages 61 to 70, and by W. Siefken, Liebigs Annalen der Chemie, volume 562, pages 75 to 136. Suitable examples include the isocyanato-containing polyurethane prepolymers, which may be prepared by reacting polyols with an excess of polyisocyanates and which are preferably of low viscosity.

Further examples of suitable polyisocyanates are polyisocyanates containing isocyanurate, biuret, allophanate, iminooxadiazinedione, urethane, urea and/or uretdione groups. Polyisocyanates containing urethane groups, for example, are obtained by reacting some of the isocyanate groups with polyols, such as

- trimethylolpropane and glycerol, for example. Preference is given to the use of aliphatic or cycloaliphatic polyisocyanates, especially hexamethylene diisocyanate, dimerized and trimerized hexamethylene diisocyanate, isophorone diisocyanate, 2-isocyanatopropylcyclohexyl isocyanate, dicyclohexylmethane 2,4'-diisocyanate, dicyclohexylmethane 4,4'-diisocyanate or 1,3-bis(isocyanatomethyl)cyclohexane, diisocyanates derived from dimeric fatty acids as sold under the commercial designation DDI 1410 by the company Henkel, 1,8-diisocyanato-4-isocyanatomethyl octane, 1,7-diisocyanato-4-isocyanatomethyl heptane or 1-isocyanato-2-(3-isocyanatopropyl)cyclohexane, or mixtures of these polyisocyanates.
- Examples of suitable blocking agents are the blocking agents known from the U.S. patent US-A-4,444,954, such as
- i) phenols such as phenol, cresol, xlenol, nitrophenol, chlorophenol, ethylphenol, t-butylphenol, hydroxybenzoic acid, esters of this acid, or 2,5-di-tert-butyl-4-hydroxytoluene;
 - ii) lactams, such as ϵ -caprolactam, δ -valerolactam, γ -butyrolactam or β -propiolactam;

- iii) active methylenic compounds, such as diethyl malonate, dimethyl malonate, ethyl or methyl acetoacetate, or acetylacetone;
- 5 iv) alcohols such as methanol, ethanol, n-propanol, isopropanol, n-butanol, isobutanol, t-butanol, n-amyl alcohol, t-amyl alcohol, lauryl alcohol, ethylene glycol monomethyl ether, ethylene glycol monoethyl ether, ethylene glycol monobutyl ether, 10 diethylene glycol monomethyl ether, diethylene glycol monoethyl ether, propylene glycol monomethyl ether, methoxymethanol, glycolic acid, glycolic esters, lactic acid, lactic esters, methylolurea, methylolmelamine, diacetone alcohol, 15 ethylenechlorohydrin, ethylenebromohydrin, 1,3-dichloro-2-propanol, 1,4-cyclohexyldimethanol or acetocyanohydrin;
- v) mercaptans such as butyl mercaptan, hexyl mercaptan, t-butyl mercaptan, t-dodecyl mercaptan, 2-mercaptobenzothiazole, thiophenol, methylthiophenol or ethylthiophenol;
- 20 vi) acid amides such as acetoanilide, acetoanisidinamide, acrylamide, methacrylamide, acetamide, stearamide or benzamide;
- 25 vii) imides such as succinimide, phthalimide or maleimide;

- viii) amines such as diphenylamine, phenylnaphthylamine, xylidine, N-phenylxylidine, carbazole, aniline, naphthylamine, butylamine, dibutylamine or butylphenylamine;
- ix) imidazoles such as imidazole or 2-ethylimidazole;
- x) ureas such as urea, thiourea, ethyleneurea, ethylenethiourea or 1,3-diphenylurea;
- xi) carbamates such as phenyl N-phenylcarbamate or 2-oxazolidone;
- xii) imines such as ethyleneimine;
- xiii) oximes such as acetone oxime, formaldoxime, acetaldoxime, acetoxime, methyl ethyl ketoxime, diisobutyl ketoxime, diacetyl monoxime, benzophenone oxime or chlorohexanone oximes;
- xiv) salts of sulfurous acid such as sodium bisulfite or potassium bisulfite;
- xv) hydroxamic esters such as benzyl methacrylohydroxamate (BMH) or allyl methacrylohydroxamate; or
- xvi) substituted pyrazoles, ketoximes, imidazoles or triazoles; and also


mixtures of these blocking agents, especially dimethylpyrazole and triazoles, malonic esters and acetoacetic esters or dimethylpyrazole and succinimide.

5

Further examples of suitable crosslinking agents (a14) are polyepoxides (a14), in particular all known aliphatic and/or cycloaliphatic and/or aromatic polyepoxides, based for example on bisphenol A or bisphenol

- 10 F. Also suitable as polyepoxides (a14), for example, are the polyepoxides obtainable commercially under the designations Epikote® from Shell, Denacol® from Nagase Chemicals Ltd., Japan, such as Denacol EX-411 (pentaerythritol polyglycidyl ether), Denacol EX-321 (tri-
15 methylolpropane polyglycidyl ether), Denacol EX-512 (polyglycerol polyglycidyl ether), and Denacol EX-521 (polyglycerol polyglycidyl ether).

- As crosslinking agents (a14) it is also possible to use
20 tris(alkoxycarbonylamino)triazines of the general formula 5 [sic]

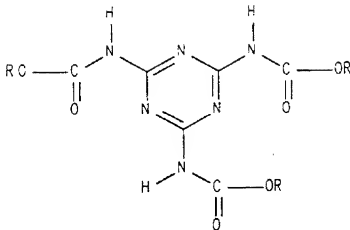

Examples of suitable tris(alkoxycarbonylamino)triazines (a14) are described in the patents US-A-4,939,213, 5 US-A-5,084,541 and EP-A-0 624 577. Use is made in particular of the tris(methoxy-, tris(butoxy- and/or tris(2-ethylhexoxycarbonylamino)triazines.

The methyl butyl mixed esters, the butyl 2-ethylhexyl 10 mixed esters, and the butyl esters are of advantage. They have the advantage over the straight methyl ester of better solubility in polymer melts, and also have less of a tendency to crystallize out.

15 Especially suitable for use as crosslinking agents (a14) are amino resins, examples being melamine resins. In this instance, use can be made of any amino resin suitable for transparent topcoats or clearcoats, or of a mixture of such amino resins. Especially suitable are 20 the customary and known amino resins some of whose methylol and/or methoxymethyl groups have been defunctionalized by means of carbamate or allophanate

groups. Crosslinking agents of this kind are described in the patents US-A-4,710,542 and EP-B-0 245 700 and also in the article by B. Singh and coworkers, "Carbamylmethylated Melamines, Novel Crosslinkers for the Coatings Industry" in Advanced Organic Coatings Science and Technology Series, 1991, volume 13, pages 193 to 207. The amino resins may furthermore be used also as binders (a11) in the base color (A1).

10 Further examples of suitable crosslinking agents (a14) are beta-hydroxyalkylamides such as N,N,N',N'-tetrakis-(2-hydroxyethyl)adipamide or N,N,N',N'-tetrakis(2-hydroxypropyl)adipamide.

15 Further examples of suitable crosslinking agents (a14) are siloxanes, especially siloxanes containing at least one trialkoxy- or dialkoxysilane group.

Further examples of suitable crosslinking agents (a14)
20 are polyanhydrides, especially polysuccinic anhydride.

The base color (A1) may further comprise at least one auxiliary and/or additive (a15) as customary and known in the field of coating materials and paints. They are
25 generally referred to by the skilled worker as coatings additives.

Examples of suitable coatings additives (a15) are

- UV absorbers;
- free-radical scavengers;
- 5 - crosslinking catalysts;
- slip additives;
- polymerization inhibitors;
- 10 - defoamers;
- emulsifiers, especially nonionic emulsifiers such as alkoxyated alkanols and polyols, phenols and alkylphenols or anionic emulsifiers such as alkali
- 15 metal salts and ammonium salts of alkanecarboxylic acids, alkanesulfonic acids, and sulfo acids of alkoxyated alkanols and polyols, phenols and alkylphenols;
- 20 - wetting agents such as siloxanes, fluorine compounds, carboxylic monoesters, phosphoric esters, polyacrylic acids and copolymers thereof, or polyurethanes;
- adhesion promoters;
- 25 - leveling agents;
- film formation auxiliaries such as cellulose derivatives;

- flame retardants or

- photoinitiators, such as photoinitiators of the
5 Norrish II type, whose mechanism of action is based
 on an intramolecular variant of the hydrogen
 abstraction reactions as occur diversely in
 photochemical reactions (by way of example, reference
 may be made here to Römpp Chemie Lexikon, 9th,
10 expanded and revised edition, Georg Thieme Verlag,
 Stuttgart, Vol. 4, 1991) or cationic photoinitiators
 (by way of example, reference may be made here to
 Römpp Lexikon Lacke und Druckfarben, Georg Thieme
 Verlag Stuttgart, 1998, pages 444 to 446); and also,
15 if desired
- the rheology control additives described below.

Further examples of suitable coatings additives (a15)
20 are described in the textbook "Lackadditive" [Additives
 for coatings] by Johan Bieleman, Wiley-VCH, Weinheim,
 New York, 1998.

The base color (A1) may further comprise constituents
25 (a16) which are curable with actinic radiation,
 especially UV radiation and/or electron beams. This
 offers the advantage that the coating materials of the
 invention are curable both physically or thermally and
 in addition are also radiation curable.

In the context of the present invention, the term "physical curing" denotes the curing of a coat of a coating material by filming, where appropriate after
5 drying of the coat. Normally, no crosslinking agents are required for this purpose. Where appropriate, physical curing may be assisted by atmospheric oxygen or by exposure to actinic radiation.

10 In the context of the present invention, the term "thermal curing" denotes the heat-initiated curing of a coat of a coating material, where normally a separate crosslinking agent is employed. This is commonly referred to by those in the art as external
15 crosslinking. Where the crosslinking agents are already incorporated in the binders, the term self-crosslinking is also used.

In the context of the present invention, actinic
20 radiation means electron beams or, preferably, UV radiation. Curing by UV radiation is normally initiated by the above-described free-radical or cationic photoinitiators.

25 Where thermal curing and curing with actinic light are employed together for a coating material, the term "dual cure" is also used.

Suitable constituents (a16) include in principle all low molecular mass, oligomeric and polymeric compounds that are curable with actinic radiation, especially UV radiation and/or electron beams, said compounds being
5 as commonly used in the field of UV curable or electron beam curable coating compositions. These radiation curable coating compositions normally include at least one, preferably two or more, radiation curable binders, based in particular on ethylenically unsaturated
10 prepolymers and/or ethylenically unsaturated oligomers, one or more reactive diluents, where appropriate, and also one or more photoinitiators, where appropriate.

Advantageously, the radiation curable binders as used
15 as constituents (a16). Examples of suitable radiation curable binders (a16) are (meth)acryloyl-functional (meth)acrylic copolymers, polyether acrylates, polyester acrylates, unsaturated polyesters, epoxy acrylates, urethane acrylates, amino acrylates, melamine
20 acrylates, silicone acrylates, and the corresponding methacrylates. It is preferred to use binders (a16) that are free from aromatic structural units. Preference is therefore given to using urethane (meth)acrylates and/or polyester (meth)acrylates, and
25 particular preference to using aliphatic urethane acrylates.

Further examples of suitable radiation curable constituents (a16) are reactive diluents, especially

low molecular mass, polyfunctional, ethylenically unsaturated ones. Examples of highly suitable compounds of this kind are esters of acrylic acid with polyols, such as neopentyl glycol diacrylate, trimethylolpropane triacrylate, pentaerythritol triacrylate or pentaerythritol tetraacrylate; or reaction products of hydroxyalkyl acrylates with polyisocyanates, especially aliphatic polyisocyanates.

10 In accordance with the invention it is of advantage if the base color (A1) to be used in accordance with the invention comprises

(a12) from 0.5 to 70% by weight of at least one effect pigment and/or at least one color pigment,

(a11) from 10 to 80% by weight of at least one water-dilutable or water-dispersible binder, and

20

(a13) from 10 to 89.5% by weight of at least one organic solvent,

the sum of the weight fractions in components (a11) to (a13) being in each case 100% by weight.

For the modular system of the invention it is of advantage, furthermore, if the base colors (A1) contain only effect pigments or only color pigments. As already

stated above, however, the modular system of the invention must always include at least one base color (A1) which comprises at least one color pigment.

- 5 Particularly preferred base colors (A1) on the basis of effect pigments comprise

(a12) from 0.5 to 50% by weight of at least one effect pigment,

10

(a11) from 20 to 80% by weight of at least one water-dilutable or water-dispersible binder, and

(a13) from 10 to 79.5% by weight of at least one organic solvent,

15

the sum of the weight fractions of the constituents (a11) to (a13) being in each case 100% by weight.

- 20 Particularly preferred base colors (A1) on the basis of inorganic color pigments (a12) comprise

(a12) from 1 to 70% by weight of at least one inorganic color pigment,

25

(a11) from 10 to 80% by weight of at least one water-dilutable or water-dispersible binder, and

(a13) from 10 to 89% by weight of at least one organic solvent,

the sum of the weight fractions of the components (a11) to (a13) being in each case 100% by weight.

5

Particularly preferred base colors (A1) on the basis of organic color pigments comprise

10 (a12) from 1 to 30% by weight of at least one organic color pigment,

(a11) from 10 to 80% by weight of at least one water-dilutable or water-dispersible binder, and

15 (a13) from 10 to 89% by weight of at least one organic solvent,

the sum of the weight fractions of the components (a11) to (a13) being in each case 100% by weight.

20 It is of course also possible to use base colors (A1) comprising a combination of at least one organic color pigment and at least one inorganic color pigment.

25 The base color (A1) may further contain from 0 to 50% by weight, based on the overall weight, of crosslinking agents (a14), coating additives (a15) and/or radiation curable constituents (a16).

Viewed in terms of its method, the preparation of the base color (A1) has no special features but instead takes place in accordance with the customary and known methods of preparing pigmented coating materials.

5

The further key constituent of the modular system of the invention is at least one aqueous color module (II).

- 10 The aqueous color module (II) comprises at least one aqueous color-imparting base color (A2).

The base color (A2) comprises as a key constituent at least one water-soluble or -dispersible binder (a21).

- 15 Suitable binders (a21) include all of the above-described binders (a11). In accordance with the invention it is of advantage if the binders used in the base color (A2) are the same as those used in the base color (A1) [(a11) = (a21)]. In accordance with the
20 invention, the above-described polyurethane resins (a113) are of particular advantage in this context and are therefore used with particular preference.

- The base color (A2) further comprises at least one
25 color pigment (a22). Examples of suitable color pigments (a22) are the above-described color pigments (a12).

The base color (A2) additionally comprises, as a further key constituent (a23), water.

5 Additionally, the base color (A2) may comprise at least one water-miscible organic solvent (a24). Examples of suitable solvents (a24) are the above-described solvents (a13). In accordance with the invention it is of advantage if the solvents used in the base color (A2) are the same as those used in the base color (a1)

10 [sic] [(a13) = (a24)].

The base color (A2) may further comprise at least one crosslinking agent (a25). Examples of suitable crosslinking agents (a25) are the above-described

15 crosslinking agents (a14). In accordance with the invention it is of advantage if the crosslinking agents used in the base color (A2) are the same as those used in the base color (A1) [(a14) = (a25)].

20 The base color (A2), moreover, may comprise at least one coatings additive (a26). Examples of suitable coatings additives (a26) are the above-described coatings additives (a15). In accordance with the invention it is of advantage if the coatings additives

25 used in the base color (A2) are the same as those used in the base color (A1) [(a15) = (a26)].

Not least, the base color (A2) may comprise at least one radiation curable constituent (a27). Examples of

suitable radiation curable constituents (a27) are the above-described radiation curable constituents (a16). In accordance with the invention it is of advantage if the radiation curable constituents used in the base color (A2) are the same as those used in the base color (A1) [(a16) = (a27)].

Particularly preferred base colors (A2) on the basis of inorganic color pigments (a22) comprise

10

(a22) from 1 to 70% by weight of at least one inorganic color pigment and

15

(a21) from 10 to 80% by weight of at least one water-dilutable or water-dispersible binder,

(a23) from 89 to 20% by weight of water, and

(a24) from 0 to 20% by weight of at least one organic solvent,

20

the sum of the weight fractions of components (a21) to (a24) being in each case 100% by weight.

Particularly preferred base colors (A1) on the basis of organic color pigments comprise

25

(a22) from 1 to 30% by weight of at least one organic color pigment and

(a21) from 10 to 80% by weight of at least one water-dilutable or water-dispersible binder,

(a23) from 89 to 10% by weight of water, and

5

(a24) from 0 to 20% by weight of at least one organic solvent,

the sum of the weight fractions of components (a21) to
10 (a24) being in each case 100% by weight.

It is of course also possible to use base colors (A2) comprising a combination of at least one organic color pigment and at least one inorganic color pigment.

15

The base color (A2) may further contain from 0 to 50% by weight, based on the overall weight, of organic solvents (a24), crosslinking agents (a25), coating additives (a26) and/or radiation curable constituents

20 (a27).

Viewed in terms of its method, the preparation of the base color (A2) likewise has no special features but instead takes place in accordance with the customary
25 and known methods of preparing pigmented coating materials by milling of their constituents in appropriate mills such as bead mills or ball mills.

The third key constituent of the modular system of the invention is at least one aqueous, pigment-free mixing varnish module (III).

- 5 The mixing varnish module (III) for use in accordance with the invention comprises at least one aqueous, pigment-free mixing varnish (B).

- 10 The first key constituent of the mixing varnish (B) is at least one water-soluble or -dispersible binder (b1). Examples of suitable binders (b1) are the binders (a11) described in detail above. In accordance with the invention it is of advantage if the binders used in the mixing varnish (B) are the same as those used in the
- 15 base color (A1) and/or (A2) [(b1) = (a11) and/or (a21)].

The further key constituent (b2) of the mixing varnish (B) is water.

20

- The mixing varnish (B) may further comprise at least one crosslinking agent (b2). Examples of suitable crosslinking agents (b2) are the above-described crosslinking agents (a14) and/or (a25). In accordance
- 25 with the invention it is of advantage if the crosslinking agents used in the mixing varnish (B) are the same as those used in the base color (A1) and/or the base color (A2) [(b3) = (a14) and/or (a25)].

The mixing varnish (B), moreover, may comprise at least one coatings additive (b4). Examples of suitable coatings additives (b4) are the above-described coatings additives (a15) and/or (a26). In accordance
5 with the invention it is of advantage if the coatings additives used in [lacuna] are the same as those used in the base color (A1) and/or the base color (A2) [(b4) = (a15) and/or (a26)].

10 The mixing varnish (B) may further comprise at least one radiation curable constituent (b5). Examples of suitable radiation curable constituents (b5) are the above-described radiation curable constituents (a16) and/or (a27). In accordance with the invention it is of
15 advantage if the radiation curable constituents used in the mixing varnish (B) are the same as those used in the base color (A1) and/or the base color (A2) [(b5) = (a16) and/or (a27)].

20 Not least, the mixing varnish (B) may comprise at least one water-miscible organic solvent (b6) in minor amounts. In the context of the present invention, the phrase "minor amount" means that the mixing varnish (B) contains organic solvents (b6) only in an amount such
25 that the aqueous nature of the mixing varnish (B) is not lost.

Examples of suitable solvents (b6) are the solvents (a13) and/or (a24) described in detail above. In

accordance with the invention it is of advantage if the solvents (b6) used in the mixing varnish (B) are the same as those used in the base colors (A1) and/or (A2) [(b6) = (a13) and/or (a24)].

5

Particularly preferred mixing varnishes (B) comprise

(b1) from 10 to 80% by weight of at least one binder (b1) and

10

(b2) from 20 to 90% by weight of water,

the sum of the weight fractions of the constituents (b1) and (b2) being in each case 100% by weight.

15

The mixing varnish (B) may further comprise from 0 to 50% by weight, based on the overall weight, of organic solvents (b6), crosslinking agents (b3), coatings additives (b4) and/or radiation curable constituents (b5).

20

Viewed in terms of its method, the preparation of the mixing varnish (B) has no special features but instead takes place in accordance with the customary and known methods of preparing varnishes using customary and known mixing equipment such as stirred tanks or dissolvers.

25

As a fourth constituent of the modular system of the invention it is possible to use at least one pigment-free rheology module (IV).

- 5 The first key constituent of the rheology module (IV) is an aqueous medium (C).

The aqueous medium (C) consists essentially of water.

- 10 In this context, the aqueous medium (C) may include minor amounts of the above-detailed constituents of the base colors (A1) and/or (A2), except for the pigments (a12) and (a22), and of the mixing varnish (B), and/or other solid, liquid or gaseous, organic and/or inorganic, low and/or high molecular mass substances,
15 in molecularly disperse solution or dispersion. In the context of the present invention, the term "minor amount" means an amount which does not remove the aqueous character of the aqueous medium (C).

- 20 In accordance with the invention, the aqueous medium (C) comprises at least one rheology control additive (c1).

- Examples of suitable rheology control additives (c1)
25 are those known from the patents WO 94/22968, EP-A-0 276 501, EP-A-0 249 201, and WO 97/12945; crosslinked polymeric microparticles, as disclosed for example in EP-A-0 008 127; inorganic phyllosilicates such as aluminum-magnesium silicates, sodium-magnesium and

sodium-magnesium-fluorine-lithium phyllosilicates of the montmorillonite type; silicas such as Aerosils; or synthetic polymers containing ionic and/or associative groups, such as polyvinyl alcohol, poly(meth)acrylamide, poly(meth)acrylic acid, polyvinylpyrrolidone, styrene-maleic anhydride or ethylene-maleic anhydride copolymers and their derivatives, or hydrophobically modified, ethoxylated urethanes or polyacrylates. As rheology control additives it is preferred to use phyllosilicates.

As already remarked above, these rheology control additives (c1) may also be present as coatings additives (a15) in the base color (A1), as coatings additives (a26) in the base color (A2) and/or as coatings additive (b4) in the mixing varnish (B), but in particular as a coatings additive (b4) in the mixing varnish (B). In accordance with the invention it is of advantage if the rheology control additives (c1) are present substantially or exclusively in the pigment-free rheology module (IV).

In the pigment-free rheology module (IV), advantageously, the aqueous medium (C) is present in an amount of from 50 to 99.5% by weight, preferably from 70 to 99% by weight, and in particular from 75 to 98.5% by weight, and the rheology control additive (c1) is present in an amount of from 0.5 to 50% by weight, preferably from 1.0 to 30% by weight, and in particular

from 1.5 to 25% by weight, based in each case on the total amount of the rheology module (IV).

5 Viewed in terms of its method, the preparation of the rheology module (IV) has no special features but instead takes place in accordance with the customary and known methods of preparing coating materials using customary and known mixing equipment such as stirred tanks or dissolvers.

10

To prepare the coating materials of the invention, the different base colors (A1) of the color and/or effect module (I), the different base colors (A2) of the color module (II), the mixing varnish (B) of the mixing
15 varnish module (III), and the rheology module (IV) are mixed in a ratio such that application of said coating materials results in coatings of the invention having the particular desired shade and/or optical effect. The mixing ratio of the aforementioned constituents is
20 determined by the requirement that the resultant coating material, irrespective of its shade, have the desired viscosity and solids content and contain the desired amount of organic solvents, etc.

25 The solids content (amount of binders (a11), (a21), and (b1) used plus the amount of pigment (a12) and (a22) used] and also the amount of organic solvents, etc., varies with the intended use of the coating materials of the invention.

For their use for automotive refinish, the solids content for metallic effect coating materials is preferably from 7 to 25% by weight and for solid-color topcoat materials is preferably from 10 to 45% by weight, based in each case on the total weight of the coating material of the invention.

One preferred embodiment of the modular system of the invention is a mixer system in which all base colors (A1) and (A2) and the mixing varnish (B) comprise the same binder, or the same binders in the case of a binder mixture. This ensures that - irrespective of the mixing ratio of the different base colors (A1) and (A2) and of the mixing varnish (B) and hence irrespective of shade and/or optical effect - the resultant mixtures of the different base colors (A1) and (A2) and of the mixing varnish (B) exhibit an approximately consistent evaporation behavior (drying) and also similar rheology. It also ensures that, when using different base colors (A1) and (A2) and mixing varnish (B), consistent film properties are obtained independently of the particular desired color shade.

Where a mixture of different binders is used in each case in the base colors (A1) and (A2) and in the mixing varnish (B), the mixing ratio of the different binders to one another in the individual base colors (A1) and (A2) and in the mixing varnish (B) should also

preferably be constant in each case, in order that, after mixing with the other constituents of the modular system of the invention, consistent mixing ratios between the binders are again achieved irrespective of the shade. Where the rheology module (IV) uses a mixture of the binders which are also used in in [sic] the individual base colors (A1) and (A2) and in the mixing varnish (B), the mixing ratio of the different binders to one another in the rheology module (IV) should also preferably be the same as the mixing ratio of these binders in the individual base colors (A1) and (A2) and in the mixing varnish (B).

Particularly preferred modular systems of the invention are obtained if the individual base colors (A1) and (A2) and the mixing varnish (B) and also, where appropriate, the rheology module (IV) comprise water-dilutable polyethane resins (all3) as binders.

The coating composition of the invention prepared with the aid of the modular system of the invention is physically curable, thermally curable, curable physically and with actinic radiation, and also curable thermally and with actinic radiation. In accordance with the invention, physical curing is of advantage, especially if the coating composition of the invention is to be used for automotive refinish or for painting plastics.

The coating materials of the invention prepared using the modular system of the invention may be applied to a very wide variety of substrates, such as metal, wood, glass, plastic or paper, for example. In particular, the aqueous coating materials prepared by means of the modular system or mixer system of the invention are suitable for the restorative painting of damage sites, in particular for automotive refinish. In this case, directly following their preparation by mixing of their constituents, the coating compositions of the invention are applied to the appropriately prepared (e.g., by filling and priming) damage site by means of customary methods, especially spraying. Preferably, the aqueous coating materials prepared using the mixer system of the invention are used to produce a basecoat film or a solid-color topcoat film, but in particular a basecoat film.

Following initial drying of the basecoat film thus prepared, at room temperature or by forced drying (e.g., 10 min at 60°C, 80°C or IR drying), a suitable clearcoat film is applied wet-on-wet for purposes of producing a multicoat color and/or effect coating system.

Coating materials used to prepare clearcoat films by the wet-on-wet technique are customary and known.

Suitable coating materials or clearcoat materials in this context include one-component (1K), two-component (2K) or multicomponent (3K, 4K) clearcoat materials, powder clearcoat materials, powder slurry clearcoat materials, and clearcoat materials curable with actinic radiation.

Examples of suitable one-component (1K), two-component (2K) or multicomponent (3K, 4K) clearcoat materials are known, for example, from the patents DE-A-42 04 518, US-A-5,474,811, US-A-5,356,669, US-A-5,605,965, WO 94/10211, WO 94/10212, WO 94/10213, EP-A-0 594 068, EP-A-0 594 071, EP-A-0 594 142, EP-A-0 604 992, WO 94/22969, EP-A-0 596 460, and WO 92/22615.

One-component (1K) clearcoat materials comprise, for example, hydroxyl-containing binders and crosslinking agents such as blocked polyisocyanates, tris(alkoxy-carbonylamino)triazines and/or amino resins. In another variant, the binders they comprise include polymers containing pendant carbamate and/or allophanate groups, and carbamate- and/or allophanate-modified amino resins.

Two-component (2K) or multicomponent (3K, 4K) clearcoat materials include as key constituents, for example, hydroxyl-containing binders and polyisocyanate crosslinking agents, which are stored separately until the time of their use.

Examples of suitable powder clearcoat materials are known, for example, from the German patent DE-A-42 22 194 or from the BASF Lacke + Farben AG product information leaflet, "Pulverlacke" [powder coating materials], 1990.

Examples of key constituents of powder clearcoat materials are binders containing epoxide groups and polycarboxylic acid crosslinking agents.

10

Examples of suitable powder slurry clearcoat materials are known, for example, from the U.S. patent US-A-4,268,542 and from the German patent applications DE-A-195 18 392.4 and DE-A-196 13 547, or are described in the German patent application DE-A-198 14 471.7, which was unpublished at the priority date of the present specification.

15

Powder slurry clearcoat materials contain, as is known, powder clearcoat materials dispersed in an aqueous medium.

20

UV curable clearcoat materials are disclosed, for example, by the patents EP-A-0 540 884, EP-A-0 568 967, and US-A-4,675,234.

25

They conventionally include low molecular mass, oligomeric and/or polymeric compounds curable with actinic light and/or electron beams, preferably

radiation curable binders, based in particular on ethylenically unsaturated prepolymers and/or ethylenically unsaturated oligomers, one or more reactive diluents, where appropriate, and also one or more
5 photoinitiators, where appropriate. Examples of suitable radiation curable binders are (meth)acryloyl-functional (meth)acrylic copolymers, polyether acrylates, polyester acrylates, unsaturated polyesters, epoxy acrylates, urethane acrylates, amino acrylates,
10 melamine acrylates, silicone acrylates, and the corresponding methacrylates. It is preferred to use binders that are free from aromatic structural units.

It is, however, also possible to employ multiple
15 clearcoat films, such as, for instance, a clearcoat film based on hydroxyl-containing binders and blocked polyisocyanates and amino resins as crosslinking agents, which lies directly atop the aqueous basecoat film, and atop which there is a further clearcoat film
20 based, for example, on binders containing carbamate and/or allophanate groups and on amino resins as crosslinking agents.

When using two-component (2K) or multicomponent
25 (3K, 4K) clearcoat materials, drying takes place preferably at temperatures of below 100°C, preferably of below 80°C. It is also possible to employ higher temperatures if necessary and/or advantageous in the specific case. The dry film thicknesses of the basecoat

film are in particular between 5 and 25 μm , those of the clearcoat film generally between 30 and 70 μm .

When using one-component (1K) clearcoat materials, powder clearcoat materials, and powder slurry clearcoat materials, the basecoat film is dried together with the topcoat film at elevated temperatures, e.g., approximately 120°C. The dry film thicknesses of the clearcoat film here are, in particular, between 30 and 50 μm .

This results in single-coat or multicoat systems of the invention having particularly high hiding power.

Inventive and comparative examples

Preparation example 1

5 Preparation of a polyurethane resin dispersion 1

A suitable reaction vessel equipped with stirrer, reflux condenser and feed vessel was charged under inert gas with 130.8 parts by weight of a polyester
10 having a number-average molecular weight M_n of 1400, based on a commercially customary unsaturated dimer fatty acid having an iodine number of 10 mg I_2/g , a monomer content of max. 0.1% by weight, a trimer content of max. 2% by weight, an acid number of from
15 195 to 200 mg KOH/g, and a saponification number of from 197 to 202 mg KOH/g, isophthalic acid and hexanediol, and the following were added to this initial charge in succession: 11.7 parts by weight of dimethyl-
olpropionic acid, 2.4 parts by weight of neopentyl
20 glycol, 103.4 parts by weight of methyl ethyl ketone, and 63.1 parts by weight of bis(4-isocyanatocyclohexyl)methane. The resultant reaction mixture was heated at reflux until the isocyanate content was constant. Then 6.1 parts by weight of trimethylolpro-
pane were added to the reaction mixture and heating
25 under reflux was continued until the viscosity was 12 dPas (50% strength solution in N-methylpyrrolidone). Any remaining free isocyanate groups were blocked by adding 3.4 parts by weight of n-butanol. The resultant

reaction mixture was subsequently admixed in succession with 6.1 parts by weight of dimethylethanolamine, 42.8 parts by weight of a polypropylene glycol having a number-average molecular weight Mn of 900, and
5 533.7 parts by weight of deionized water. Removal of the methyl ethyl ketone by vacuum distillation gave a polyurethane resin dispersion which was adjusted to a solids content of 30% by weight using deionized water. The resultant polyurethane resin dispersion 1 had a pH
10 of 7.7.

The polyurethane resin dispersion 1 was used to prepare the pigment-free mixing varnish (B) and as a grinding resin for the aqueous, color-imparting base color (A2).

15

Preparation example 2

Preparation of a polyurethane resin 2

20 A suitable reaction vessel equipped with stirrer, reflux condenser and feed vessel was charged under inert gas with 214.7 parts by weight of the polyester described in more detail in preparation example 1, and the following were added to this initial charge in
25 succession: 19.2 parts by weight of dimethylolpropionic acid, 4.0 parts by weight of neopentyl glycol, 169.7 parts by weight of methyl ethyl ketone, and 103.6 parts by weight of bis(4-isocyanatocyclohexyl)-methane. The resultant reaction mixture was heated at

reflux until the isocyanate content was constant. Then 10 parts by weight of trimethylolpropane were added to the reaction mixture and heating under reflux was continued until the viscosity was 10 dPas (50% strength solution in N-methylpyrrolidone). After that there were 5 452.4 parts by weight of butyl glycol to be added. Removal of the methyl ethyl ketone by vacuum distillation was followed by neutralization of the resin solution with 11.7 parts by weight of 10 dimethylethanolamine and adjustment of its solids content to 44% using butyl glycol.

The polyurethane 2 was used as a binder for preparing the color- and effect-imparting base color (A1).

15 Preparation example 3

Preparation of a polyurethane resin 3

20 A suitable reaction vessel equipped with stirrer, reflux condenser and feed vessel was charged under inert gas with 280.2 parts by weight of a polyester having a number-average molecular weight M_n of 1350, based on a commercially customary unsaturated dimer 25 fatty acid having an iodine number of 10 mg I_2/g , a monomer content of max. 0.1% by weight, a trimer content of max. 2% by weight, an acid number of from 195 to 200 mg KOH/g, and a saponification number of from 197 to 202 mg KOH/g, isophthalic acid, neopentyl

glycol, and hexanediol, and the following were added to this initial charge in succession: 24.4 parts by weight of dimethylolpropionic acid, 4.0 parts by weight of neopentyl glycol, 218.4 parts by weight of methyl ethyl ketone, and 123.1 parts by weight of tetramethylxyl-
ylidene diisocyanate. The resultant reaction mixture was heated at reflux until the isocyanate content was constant. Then 18.5 parts by weight of trimethylolpropane were added to the mixture and heating under
reflux was continued until the viscosity was 4.0 dPas (10 parts by weight of reaction mixture in 6 parts by weight of N-methylpyrrolidone). After that there were 276.9 parts by weight of butyl glycol to be added. Removal of the methyl ethyl ketone by vacuum
distillation was followed by neutralization of the resin solution with 13.0 parts by weight of dimethylethanolamine in 30 parts by weight of butyl glycol and adjustment of its solids content to 60% using butyl glycol.

The polyurethane resin 3 was used for preparing a water-free color-imparting base color (A1).

Preparation example 4

Preparation of the pigment-free mixing varnish (B)

527 parts by weight of the polyurethane resin dispersion 1 from preparation example 1 were admixed

with 362.5 parts by weight of denionized water and 0.25 part by weight of a commercially customary thickener based on polyurethane. The result was the pigment-free mixing varnish (B).

5

Preparation example 5

Preparation of the rheology module (IV)

- 10 32.5 parts by weight of a preswollen aqueous paste containing 1.5 parts by weight of an inorganic sodium-magnesium phyllosilicate thickener and 1 part by weight of polypropylene glycol having a number-average molecular weight of 900 were admixed with 67.5 parts by weight of deionized water, with stirring. The result was the rheology module (IV).

Preparation example 6

- 20 **Preparation of a green-pigmented aqueous base color (A2)**

- 20 parts by weight of Heliogen green were mixed with 72 parts by weight of the polyurethane resin dispersion 1 from preparation example 1, 4 parts by weight of butyl glycol and 4 parts by weight of a commercially dispersing assistant based on a high molecular mass block copolymer, with stirring, and the mixture was dispersed using a bead mill. The result was

the aqueous base color (A2). The degree of pigmentation was determined by the desired flow behavior and the desired rheology.

5 Preparation example 7 (comparative example)

Preparation of a green-pigmented aqueous base color (A1)

10 14 parts by weight of Heliogen green were mixed with
44.8 parts by weight of the polyurethane resin solution
3 from preparation example 3, 20.7 parts by weight of
butyl glycol, 16.4 parts by weight of sec-butanol, and
3.8 parts by weight of a commercially customary wetting
15 agent, with stirring, and the mixture was dispersed
using a bead mill. The result was the aqueous base
color (A1). Here again, the degree of pigmentation was
determined by the desired flow behavior and the desired
rheology.

Preparation example 8

Preparation of a water-free color- and effect-imparting base color (A1)

5

25 parts by weight of a blue pearl effect pigment were mixed with 14.3 parts by weight of the polyurethane resin solution 2 in preparation example 2, 14.3 parts by weight of sec-butanol, 3.3 parts by weight of butyl glycol, 3.3 parts by weight of a commercially customary wetting agent, and 2.0 parts by weight of a pyrogenic silica and the mixture was homogenized in a dissolver for ten minutes. 37.5 parts by weight of the polyurethane resin solution 2 were added to the resultant mixture, giving the base color (A1).

Inventive examples and comparative example

Preparation of an inventive and of a noninventive coating material, and production of inventive and noninventive multicoat systems

The coating materials were prepared by mixing of their constituents. The table gives an overview of the composition used in each case. The viscosity was in each case approximately 18 s in the DIN 4 cup at 20°C.

Table: The composition of the inventive coating material (inventive example) and of the noninventive coating material (comparative example)

	Inventive example	Comparative example
Constituent:		
Mixing varnish (B) from preparation example 4 (g)	13.1	42.6
Aqueous base color (A2) from preparation example 6 (g)	26.3	-
Water-free base color (A1) from preparation example 7 (g)	-	13.8
Water-free base color (A1) from preparation example 8 (g)	11.0	4.0
Rheology module (IV) from preparation example 5 (g)	49.6	39.6
Properties:		
Pigment content (%)	8.0	2.9
Hiding power (μm)	10	20

The comparison of the inventive example with the comparative example shows that the inventive coating material could be furnished with a higher pigment content than the noninventive coating material.

5

To produce the multicoat systems, phosphated steel panels which had been given an electrodeposition coating based on a commercially customary electrocoat material and a primer-surfacer coat based on a commercially customary aqueous primer-surfacer were coated with the coating material of the inventive example and with the coating material of the comparative example. After a flashoff time of 30 minutes at room temperature in each case, the wet films were overcoated with a commercially customary, conventional two-component clearcoat material based on a hydroxyl-containing acrylate copolymer binder and a polyisocyanate crosslinker and were dried at 60°C for 30 minutes.

20

This gave multicoat systems having a basecoat with a thickness of 12 to 15 μm and a clearcoat with a thickness of from 40 to 45 μm . In terms of the overall visual impression it gave, the inventive multicoat system was clearly superior to the noninventive system.

The hiding power of the basecoats was determined by applying the inventive and noninventive coating materials to a black/white contrast card and measuring

the dry film thickness at which the contrast cards were fully obscured. As is evident from comparing the data in the table, the inventive basecoat was clearly superior to the noninventive basecoat in this respect

5 as well.

1.00
0.99
0.98
0.97
0.96
0.95
0.94
0.93
0.92
0.91
0.90
0.89
0.88
0.87
0.86
0.85
0.84
0.83
0.82
0.81
0.80
0.79
0.78
0.77
0.76
0.75
0.74
0.73
0.72
0.71
0.70
0.69
0.68
0.67
0.66
0.65
0.64
0.63
0.62
0.61
0.60
0.59
0.58
0.57
0.56
0.55
0.54
0.53
0.52
0.51
0.50
0.49
0.48
0.47
0.46
0.45
0.44
0.43
0.42
0.41
0.40
0.39
0.38
0.37
0.36
0.35
0.34
0.33
0.32
0.31
0.30
0.29
0.28
0.27
0.26
0.25
0.24
0.23
0.22
0.21
0.20
0.19
0.18
0.17
0.16
0.15
0.14
0.13
0.12
0.11
0.10
0.09
0.08
0.07
0.06
0.05
0.04
0.03
0.02
0.01
0.00

Aqueous coating material and modular system for its preparation

5 Patent claims:

1. An aqueous coating material preparable by mixing with one another

10 (A1) at least one substantially water-free color-
and/or effect-imparting base color
comprising

(a11) at least one optionally water-soluble
15 or -dispersible binder,

(a12) at least one color and/or effect
pigment, and

20 (a13) at least one optionally water-miscible
organic solvent and also, if desired,
comprising

(a14) at least one crosslinking agent and/or

25 (a15) at least one auxiliary and/or additive
(coatings additive);

(A2) at least one aqueous color-imparting base
color comprising

5 (a21) at least one water-soluble or
-dispersible binder,

(a22) at least one color pigment, and

(a23) water, and also, if desired, comprising

10 (a24) at least one optionally water-miscible
organic solvent,

(a25) at least one crosslinking agent and/or

15 (a26) at least one auxiliary and/or additive
(coatings additive);

and

20 (B) at least one aqueous, pigment-free mixing
varnish comprising

(b1) at least one water/soluble or
-dispersible binder and

25

(b2) water, and also, if desired, comprising

(b3) at least one crosslinking agent and/or

(b4) at least one auxiliary and/or additive
(coatings additive);
and also, if desired, comprising

5 (C) a pigment-free aqueous medium comprising

(c1) at least one rheology control additive;
with the proviso that the coatings additives
(a15), (a26) and/or (b4) may also comprise at
10 least one rheology control additive (c1).

2. A modular system for preparing aqueous coating
materials, at least comprising

15 (I) at least one substantially water-free color
and/or effect module comprising

(A1) at least one substantially color- and/or
effect-imparting base color comprising

20

(a11) at least one optionally water-
soluble or -dispersible binder,

25

(a12) at least one color and and/or
[sic] effect pigment, and

(a13) at least one optionally water-
miscible organic solvent and
also, if desired, comprising

(a14) at least one crosslinking agent
and/or

5 (a15) at least one auxiliary and/or
additive (coatings additive);

(II) at least one aqueous color module
comprising

10 (A2) at least one aqueous color-imparting
base color comprising

(a21) at least one water-soluble or
-dispersible binder,

15 (a22) at least one color pigment,
and

(a23) water, and also, if desired,
comprising

20 (a24) at least one optionally water-
miscible organic solvent,

(a25) at least one crosslinking
25 agent and/or

(a26) at least one auxiliary and/or
additive (coatings additive);

and

(III) at least one aqueous, pigment-free mixing
varnish module comprising

(B) at least one pigment-free mixing
varnish comprising

(b1) at least one water-soluble or
-dispersible binder and

(b2) water, and also, if desired,
comprising

(b3) at least one crosslinking
agent and/or

(b4) at least one auxiliary and/or
additive (coatings additive);

and also, if desired, comprising

(IV) at least one pigment-free rheology module
comprising

(C) an aqueous medium comprising

(c1) at least one rheology control
additive;

with the proviso that the coatings additives (a15), (a26) and/or (b4) may also comprise at least one rheology control additive (c1).

5 3. A process for preparing an aqueous coating material with precisely defined shade and optical effect by with [sic] mixing modules differing in material composition and function and stored separately from one another, shortly before the application of the coating material, which
10 comprises mixing with one another at least [sic]

(I) at least one substantially water-free color and/or effect module comprising

15 (A1) at least one substantially water-free color- and/or effect-imparting base color comprising

20 (a11) at least one optionally water-soluble or -dispersible binder,

(a12) at least one color and/or effect pigment, and

25 (a13) at least one optionally water-miscible organic solvent and also, if desired, comprising

(a14) at least one crosslinking agent
and/or

(a15) at least one auxiliary and/or
additive (coatings additive);

5

(II) at least one aqueous color module comprising

(A2) at least one aqueous color-imparting
base color comprising

10

(a21) at least one water-soluble or
-dispersible binder,

15

(a22) at least one color pigment, and

(a23) water, and also, if desired,
comprising

20

(a24) at least one optionally water-
miscible organic solvent,

(a25) at least one crosslinking agent
and/or

25

(a26) at least one auxiliary and/or
additive (coatings additive);

and

(III) at least one pigment-free mixing varnish module comprising

5 (B) at least one aqueous, pigment-free mixing varnish comprising

(b1) at least one water-soluble or -dispersible binder and

10

(b2) water, and also, if desired, comprising

15

(b3) at least one crosslinking agent and/or

(b4) at least one auxiliary and/or additive (coatings additive);

20

and also, if desired, comprising

(IV) at least one pigment-free rheology module comprising

25

(C) an aqueous medium comprising

(c1) at least one rheology control additive;

with the proviso that the coatings additives (a15), (a26) and/or (b4) may also comprise at least one rheology control additive (c1).

5 4. The aqueous coating material as claimed in claim 1, the modular system as claimed in claim 2 or the process as claimed in claim 3, wherein the base color (A1) imparts effect or both color and effect.

10

5. The modular system as claimed in claim 2 or 4 or the process as claimed in claim 3 or 4, wherein the modular system comprises

15 1. at least one substantially water-free color module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III) or

20 2. at least one substantially water-free color and effect module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III), or

25 3. at least one substantially water-free effect module (I), at least one substantially water-free color module (I), at least one aqueous color module (II), and at least one aqueous, pigment-free mixing varnish module (III).

6. The coating material as claimed in claim 1 or 4,
the modular system as claimed in any of claims 2,
4 and 5, or the process as claimed in any of
claims 3 to 5, wherein at least one aqueous,
5 pigment-free mixing varnish (B) comprises at least
one rheology control additive as coatings
additive (b4).
7. The coating material as claimed in claim 1 or 4,
10 comprising a pigment-free aqueous medium (C), the
rheology control additive (c1) being present only
in said medium (C).
8. The modular system as claimed in any of claims 2,
15 4 and 5 or process as claimed in any of claims 3
to 5, wherein the modular system comprises at
least one pigment-free rheology module (IV).
9. The aqueous coating material as claimed in any of
20 claims 1, 4, 6 and 7, the modular system as
claimed in any of claims 2, 4 to 6 and 8, or the
process as claimed in with [sic] any of claims 3
to 6 and 8, wherein the binders (a11), (a21), and
(b1) come from the same polymer class.
- 25 10. The aqueous coating material, the modular system
or the process as claimed in claim 9, wherein the
binders (a11), (a21) and (b1) are polyurethane
resins.

11. The aqueous coating material as claimed in any of claims 1, 4, 6, 7, 9 and 10, the modular system as claimed in any of claims 2, 4 to 6 and 8 to 10, or the process as claimed in any of claims 3 to 6 and 8 to 10, wherein the binders (a21) and (b1) and also, if desired, the binder (a11) comprise

(ii) functional groups which can be converted into anions by neutralizing agents, and/or anionic groups, especially carboxylic acid and/or carboxylate groups.

12. The use of the aqueous coating material as claimed in any of claims 1, 4, 6, 7, 9 and 10, of the modular system as claimed in any of claims 2, 4 to 6 and 8 to 10, or of the process as claimed in any of claims 3 to 6 and 8 to 10 in automotive OEM finishing, refinish, and the coating of plastics, but especially automotive refinish.

13. The use of the aqueous coating material as claimed in any of claims 1, 4, 6, 7, 9 and 10, of the modular system as claimed in any of claims 2, 4 to 6 and 8 to 10, or of the process as claimed in any of claims 3 to 6 and 8 to 10 for preparing solid-color topcoats and basecoats, but especially basecoats, for automotive OEM finishing, refinish, and the coating of plastics, but especially automotive refinish.

14. An automotive OEM coating or automotive refinish,
or else a coating on a plastic, producible from
aqueous coating materials as set forth in any of
claims 1, 4, 6, 7, 9 and 10 and/or using the
5 modular system as claimed in any of claims 2, 4 to
6 and 8 to 10 and/or using the process as claimed
in any of claims 3 to 6 and 8 to 10.
15. An automotive OEM coating or automotive refinish,
10 or else a coating on a plastic, as claimed in
claim 14, comprising multicoat color and/or effect
coating systems producible in particular by the
wet-on-wet technique.
- 15 16. An article, especially an automobile body or
plastics component, having an automotive OEM
finish or automotive refinish and/or a coating on
a plastic, as claimed in claim 14 or 15.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)		Attorney Docket No.	IN - 5530
		First Named Inventor	Bernhard LETTMANN
<input checked="" type="checkbox"/> Declaration Submitted with initial Filing or <input type="checkbox"/> Declaration Submitted after initial Filing (surcharge (37 CFR 1.16 (e)) required)		COMPLETE IF KNOWN	
		Application Number	
		Filing Date	October 30, 2011
		Group Art Unit	
		Examiner Name	

As below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

AQUEOUS COATING MATERIAL AND MODULAR SYSTEM FOR PRODUCING SAME

(Title of the invention)

The specification of which:

☒ is attached hereto
☒ Was filed on **13. April 2000** as United States Application or PCT International Application Number **PCT/EP00/03355**
 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application

I hereby claim foreign priority benefits under 35, U.S.C § 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or 365 (a) of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below, by checking the box, any foreign application(s) for patent or inventor's certificate, or any PCT international application(s) having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date DATE/MONTH/YEAR	Priority Not Claimed	Certified Copy Attached?	
				Yes	No
199 21 457.3	GERMANY	8. May 1999	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Additional foreign application number are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C 119(e) of any United States provisional application(s) listed below:

APPLICATION NUMBER(S) FILING DATE

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

DECLARATION — Utility or Design Patent Application

POWER OF ATTORNEY

☒ I hereby appoint the practitioner(s) associated with the Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith application and to transact all business in the Patent and Trademark Office connected therewith

☒ Customer Number or Bar Code Label


26922

PATENT, TRADEMARK OFFICE

or ☐ Correspondence address below

County	United States of America	Telephone	(248) 948-2019	Fax	(248) 948-2093
--------	--------------------------	-----------	----------------	-----	----------------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name OF SOLE OR FIRST INVENTOR:

☐ A petition has been filed for this unsigned inventor
Given Name
(first and middle (if any)) H O BernhardFamily Name
or Surname LETTMANN

Inventor's

Date

Signature Bernhard LettmannDate 01.10.01

Residence: City

D-48317 Drensteinfurt

State

Germany

Country

Federal Republic

Citizenship

German

Residence: City

D-48317 Drensteinfurt

State

Germany

Country

Federal Republic

Citizenship

German

Mailing Address

Heineweg 2

City

D-48317 Drensteinfurt

State

Germany

Zip